



# FMAX312

## TRIPLE DUAL WHEEL GOOSENECK

With up to a 40,000lb GVWR, 18" Engineered Beam frame, and 9,000lb curb weight, the FMAX312 is indisputably the king of the road.

30,000 lb GVWR

Available Sizes: 25' x 102", 28' x 102", 30' x 102"  
32' x 102", 35' x 102", 38' x 102", 40' x 102", 44' x 102"

### STANDARD FEATURES

- LOADING STYLE:** 12' Hydraulic Dovetail, Max Ramps, XDR Ramps, or Straight Deck
- AXLES:** 3 - 12,000 lb General Duty Electric Brake, Oil Bath
- COUPLER:** 30,000 lb Bulldog BX1
- CROSS-MEMBERS:** 3" Channel on 16" Centers w/Formed Gussets
- FRAME:** 16" Engineered Beam 20' - 32' (Low Profile)  
18" Engineered Beam 35' - 44' (Low Profile)
- JACK:** 2 - 12,000 lb Drop-Leg Jacks
- NECK:** 12" Engineered Neck
- STAKE POCKETS:** 2" x 3/8" Rub Rail w/ Stake Pockets & Pipe Spools
- STORAGE:** Diamond Plate Neck Box w/ Gas Shock Assisted Lid
- SWAY CONTROL:** Standard on 30' - 44' models
- TIRES:** ST235/80R16 Radial, Dually

**DM** POWDER COAT  
COATING SYSTEM

STANDARD COLORS								
	BLACK	WHITE	RED	CEMENT GRAY	METALLIC GRAY	METALLIC SILVER	METALLIC MOCHA	METALLIC BLUE
SPECIAL COLORS								
	COMMERCIAL YELLOW	TRACTOR GREEN	INDUSTRIAL ORANGE	CUSTOM COLOR				

### AVAILABLE WHEELS



SILVER (standard)



BLACK


### POPULAR UPGRADES

- 40,000 lb GVWR Package
- Electric-Over-Hydraulic Disc Brakes
- Blackwood Floor
- 2 - 25,000 lb Two Speed Drop-Leg Jacks
- 7'x 8' Weld-On/Bolt-On Deck on the Neck
- 14" x 14" x 36" Under-Slung Box
- Air Ride Suspension
- ST215/75R17.5 Radial Dually Tires

# ENGINEERED TO DELIVER




U.S. Patent Protected

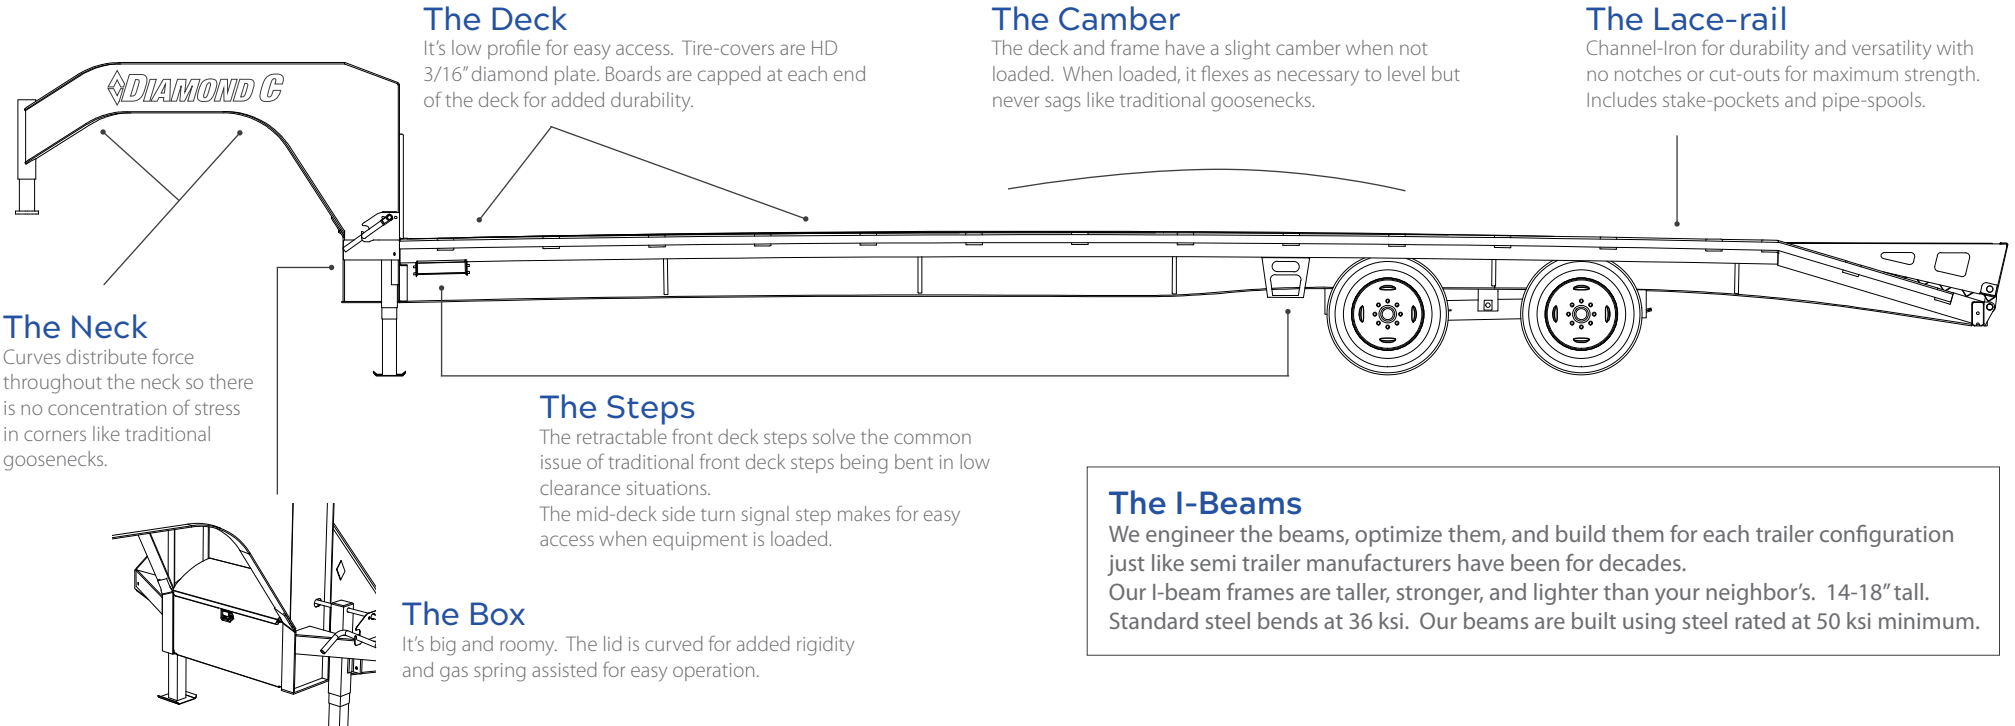

## Tail Options


### Straight Deck

With 8' slide-in ramps.  
Single piece bumper with light protection.

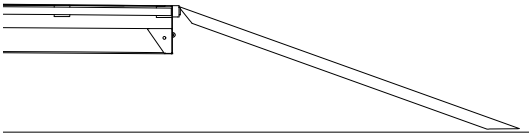


### 12' Hydraulic Dovetail

12' long with easy to climb, 12.5 degree approach angle. Blackwood rubber-infused runners for traction. Automatic latch for easy operation. Includes wireless remote control.

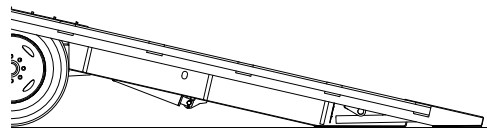

### MAX Ramps

44" wide ramps for MAX versatility.  
50 ksi steel ramp frames X 4 frames per ramp for MAX strength. HD Spring loaded for easy lifting from deck and from ground.

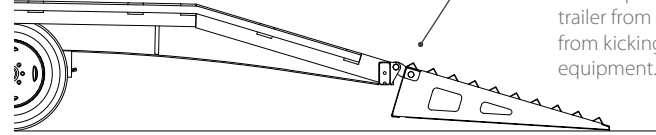

### MAX Hinges

The two point ramp hinges are concealed and protected inside of the bumper like most. Our hinges transfer the force of the load into the knees of the ramps to prevent the back of the trailer from sagging and the ramps from kicking up when loading heavy equipment. For safe, stable loading.



Sealed Wiring Harness



LED Lights



Dexter Axles



Powder Coating Finish



Warranty Quality & Workmanship

**LIGHTER. STRONGER. #DOWORK**

For additional information visit:  
[www.diamondc.com/fleetneck](http://www.diamondc.com/fleetneck)

