

## Popular Options



MAX Ramps W/Expanded Metal



Winch Plate



Rub Rail



Heavy Duty 10" Fenders



2" Diamond Plate on Dove Tail



Steel Floor DP



M19 - D-Ring



Running Boards



Front Tongue Mount Toolbox w/Gas Shock



Fold Up Ramps 5' x 16"

## Available Colors

Metallic Gray	Neon Pink	Neon Safety Green	OD Army Green	Bitter Sweet Orange	Brite Red	Silver	White	Black	Metallic Black	Coyote Tan	Equipment Yellow	Enviro Green
Metallic Blue	Charcoal Metallic Gray	Brite Red	High Gloss Black	Enviro Green	Equipment Yellow	Bitter Sweet Orange	Traffic White	OD Army Green	Coyote Tan	Neon Safety Green	Pink	

AUTHORIZED DEALER  
03-2015



Scan for more details

G.V.W.R. 7,000-21,000 lbs. | Length 12'-40' | Width 80"-102"

# Carhaulers & Bobcats



## Key Advantages

- Industry Best Warranty
- Free Roadside Assistance
- National Dealer Network
- Commercial Grade Construction
- Dexter E-Z Lube® Axles
- Dexter NEV-R Adjust™ Forward Self Adjusting Electric Brake Axles
- Sherwin-Williams® Powder Coat
- Primer Standard
- Radial Tires Standard
- Powder Coated Wheels
- Sealed Wiring Harness
- D-Rings and Stake Pockets
- Channel Frame Construction
- 16" Center Crossmembers
- Pressure Treated 2x6 Decking
- Recessed DOT Compliant LED Lighting
- NATM Compliant Since 1999
- Sandblasted and Zirconium Washed
- Wrapped Tongue
- Hand Pinstriping
- Attractive Design
- Endless Options for Customization
- Made In USA



LOAD TRAIL 220 FM 2216  
Sumner, TX 75486  
Phone 903-783-3900  
[www.loadtrail.com](http://www.loadtrail.com)





Carhauler with Channel Frame

CH

Available GVWR:  
7,000  
9,990  
14,000  
21,000  
24,000



Stock photo. May be shown with optional equipment.

STANDARD FEATURES

GVWR:	7,000 lb
GAWR:	3,500 Lb (ea axle)
Couplers	2" A-Frame 7,000 Lb
Safety Chains	7,600 Lb 5/16 X 29 G#30
Jack	5,000 Lb Top Wind Swivel Jack
Axles	2-3,500 Lb Cambered Dexter Spring 1 Elec. Brake Forward Adjusting
Wheels	15" 5-Hole
Tires	205/75 R15 LRC
Suspension	Multi-Leaf Spring
Tongue_Neck	5" Channel (6.7 lbs/ft)
Frame	5" Channel (6.7 lbs/ft)
Uprights	2" X 2" 3/16" Angle Iron
Crossmembers	3" Channel 24" OC (3.5 lbs/ft)
Flooring	Treated Wood
Fenders	Removable Smooth Plate
Ramps	5' Slide-In Ramps
Front Rail	2" X 2" 1/8" Tubing
Lights	LED D.O.T. Stop, Tail, Turn and Clearance
Wire Harness	16 Ga. 5-Way Double Insulated Harness w/Cold Weather Cord 7-way plug
D-Rings	3" Standard D-Rings
Finishing Coat/Primer	Sherwin-Williams Powdura OneCure, Primer w/Polyester TGIC Gloss Powder Topcoat
Finish (prep)	Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
Color	Black

Available Sizes

LENGTH	WEIGHT
83" X 12'	2,305 lbs.
83" X 14'	2,456 lbs.
83" X 16'	2,624 lbs.
83" X 18'	2,783 lbs.
83" X 20'	2,945 lbs.
83" X 22'	3,153 lbs.
83" X 24'	3,723 lbs.
83" X 26'	3,881 lbs.
83" X 28'	
83" X 30'	
83" X 32'	
83" X 34'	
83" X 36'	
83" X 38'	
83" X 40'	
*[Base Weight Estimate Only]	
*[Some sizes not available with different axle ratings.]	
Deck Height - "	

Also available in 102" Wide\*  
Available Options

- 2 - 3,500 lbs. Dexter Nev-R Adjust Brake Axles
- 2 - 5,200 lbs. Dexter Nev-R Adjust Brake Axles
- 2 or 3 - 7,000 lbs. Dexter Nev-R Adjust Brake Axles
- 2 or 3 - 8,000 lbs. Dexter Nev-R Adjust Brake Axles
- Axles available in Straight, Drop & Torsion, Electric & Hydraulic
- ST225/75 R15 LRD 8 Ply. Tires
- ST235/80 R16 LRE 10 Ply. Tires
- ST235/85 R16 LRG 14 Ply. Tires
- 215-75R-175H-1 Single (8k) Tires
- 6" Channel Frame (standard with 7K Axles)
- 8" Channel Frame (standard on 24'+)
- Coupler 2" or 2-5/16" A-Frame Stamped
- Coupler 2" A-Frame Cast Hyd.
- Coupler 2" or 2-5/16" Adjustable 4 & 6 Hole
- Coupler 2-5/16" Adjustable Hyd.
- Coupler 2-5/16" Adjustable Flat Mount Turtle
- Coupler Pintle Ring 3" Adjustable 4 & 6 Hole
- 2', 3' & 4' Dove Tails
- Diamond Plate On Dove Tail
- Diamond Plate Steel Floor
- Rough Oak Floor
- Douglas Fir Wood Floor
- Blackwood Lumber Floor
- Wet Bolt Kit Equalizer Lubrication
- Smooth Plate Tear Drop Weld-On Fenders
- Diamond Plate Weld-On & Removable Fenders
- Diamond Plate Alum. Tear Drop Removable Fenders
- Drive Over Weld-On Fenders
- Fork Holders
- 4', 5' & 6' HD Fold Gate w/Ramp & Springs
- 4', 5' & 6' HD Split Fold Gate w/Ramp & Springs
- 6' Stand Up Ramps w/Center Gate & Springs
- Fold Up Ramps 5' x 16"
- 3rd. Fold Up Ramp 5' x 16"
- MAX Ramps w/Dove
- Slide-In Ramps 6' x 13"
- Rear Slide-IN Ramps 5' x 13" (Standard 18'+)
- 12" & 16" Cross-Members
- Jack Drop Leg 7000 lb.
- 1-10K Spring Loaded Drop Leg Jack
- 2-10K Spring Loaded Drop Leg Jacks (standard on 24'+)
- 1 or 2-10K Hyd. Jacks w/Solar Panel Charger
- Double Hinges for 2 or 3 Ramps
- LED Back Up Lights
- LED Single & Dual Row Light Bar
- 3" & 4" Weld On D-Rings
- 4" Recessed 360 Rotational Bolt On D-Rings
- Mud Flaps
- Running Boards
- Rub Rail
- 2 - Rear Support Stands (5K or 7K Jacks)
- 2 - Rear Support Tubing Stands
- 1 - MAX Side Step
- 4 - Additional Stake Pockets
- Spare Tires
- Front Tongue Mount Tool Box w/Gas Shock
- Weld-On & Removable Spare Tire Mount
- Winch Plate
- 12K, 15K and 17.5K Winch Package

Carhauler with Angle Iron Frame

CP

Available GVWR:  
7,000  
9,990  
14,000



Stock photo. May be shown with optional equipment.

STANDARD FEATURES

GVWR:	7,000 lb
GAWR:	3,500 Lb (ea axle)
Couplers	2" A-Frame 7,000 Lb
Safety Chains	7,600 Lb 5/16 X 29 G#30
Jack	2,000 Lb Top Wind
Axles	2 - 3,500 Lb Cambered Dexter Spring 1 Elec Brake Forward Adjusting
Wheels	15" 5-Hole
Tires	205/75 R15 LRC
Suspension	Multi-Leaf Spring
Tongue_Neck	5" Channel (6.7 lbs/ft)
Frame	3" x 5" Angle Iron
Uprights	2" x 2" x 1/8" Angle Iron
Crossmembers	2" x 3" Angle Iron 24" OC (3.07 lbs/ft)
Flooring	Treated Wood
Fenders	Weld On Smooth Plate
Ramps	5' Slide-In Ramps
Front Rail	2" X 2" 1/8" Angle Iron
Lights	LED D.O.T. Stop, Tail, Turn and Clearance
Wire Harness	16 Ga. 5-Way Double-Insulated w/7-way plug
D-Rings	3" Standard D-Rings
Finishing Coat/Primer	Sherwin-Williams Powdura OneCure, Primer w/Polyester TGIC Gloss Powder Topcoat
Finish (prep)	Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
Color	Black

Available Sizes

LENGTH	WEIGHT
83" X 16'	2,900 lbs.
83" X 18'	3,050 lbs.
83" X 20'	3,202 lbs.
83" X 22'	3,353 lbs.
*[Base Weight Estimate Only]	
*[Some sizes not available with different axle ratings.]	
Deck Height - "	

Available Options

- 2 - 3,500 lbs. Dexter Nev-R Adjust Brake Axles
- 2 - 5,200 lbs. Dexter Nev-R Adjust Brake Axles
- 2 - 7,000 lbs. Dexter Nev-R Adjust Brake Axles
- Axles available in Straight, Electric & Hydraulic
- ST225/75 R15 LRD 8 Ply. Tires
- ST235/80 R16 LRE 10 Ply. Tires
- ST235/85 R16 LRG 14 Ply. Tires
- Coupler 2" or 2-5/16" A-Frame Stamped
- Coupler 2" A-Frame Cast Hyd.
- Coupler 2" or 2-5/16" Adjustable 4 & 6 Hole
- Coupler 2-5/16" Adjustable Hyd.
- 2', 3' & 4' Dove Tails
- Diamond Plate On Dove Tail
- Diamond Plate Steel Floor
- Rough Oak Floor
- Douglas Fir Wood Floor
- Blackwood Lumber Floor
- Wet Bolt Kit Equalizer Lubrication
- Smooth Plate Tear Drop Weld-On Fenders
- Diamond Plate Weld-On Fenders
- 4', 5' & 6' HD Fold Gate w/Ramp & Springs
- 4', 5' & 6' HD Split Fold Gate w/Ramp & Springs
- 6' Stand Up Ramps w/Center Gate & Springs
- Fold Up Ramps 5' x 16"
- 3rd. Fold Up Ramp 5' x 16"
- MAX Ramps w/Dove
- Slide-In Ramps 6' x 13"
- Rear Slide-IN Ramps 5' x 13" (Standard 18'+)
- 12" & 16" Cross-Members
- Jack Swivel 5000 lb.
- 1-10K Spring Loaded Drop Leg Jack
- 2-10K Spring Loaded Drop Leg Jacks (standard on 24'+)
- 1 or 2-10K Hyd. Jacks w/Solar Panel Charger
- Double Hinges for 2 or 3 Ramps
- LED Back Up Lights
- LED Single & Dual Row Light Bar
- 3" & 4" Weld On D-Rings
- 4" Recessed 360 Rotational Bolt On D-Rings
- Mud Flaps
- Sq. Tube Weld-On Side Rails
- 3" Pipe Top Weld-On Side Rails
- 16" Exp. Metal or Solid Metal Sides
- Running Boards
- Rub Rail
- 2 - Rear Support Stands (5K or 7K Jacks)
- 2 - Rear Support Tubing Stands
- 1 - MAX Side Step
- 4 - Additional Stake Pockets
- Spare Tires
- Front Tongue Mount Tool Box w/Gas Shock
- Front Tool Cage w/Expanded Metal
- Weld-On & Removable Spare Tire Mount
- Winch Plate
- 12K, 15K and 17.5K Winch Package



For a complete list of options available for this model, go to [www.loadtrail.com](http://www.loadtrail.com)



For a complete list of options available for this model, go to [www.loadtrail.com](http://www.loadtrail.com)

Carhauler with I-Beam Frame

CB

Available GVWR:  
14,000



Stock photo. May be shown with optional equipment.

STANDARD FEATURES

GVWR:	14,000 lb
GAWR:	7,000 Lb (ea axle)
Couplers	2-5/16" Adjustable
Safety Chains	18,800 Lb 5/16 x 28 G#70
Jack	1-10K Drop Leg Spring Return
Axles	2-7,000 Lb Drop Cambered Dexter Spring 1 Elec Brake Forward Adjusting
Wheels	16" 8-Hole
Tires	235/80 R16 LRE
Suspension	Multi-Leaf Spring
Tongue_Neck	6" I-Beam (12 lbs/ft)
Frame	6" I-Beam (12 lbs/ft)
Uprights	2" x 2" x 3/16" Angle Iron
Crossmembers	3" Channel 16" OC (3.5 lbs/ft)
Flooring	Treated Wood
Fenders	Weld On Diamond Plate
Ramps	5' Slide-In Ramps
Top Rail	2" x 2" x 1/8" Tubing
Lights	LED D.O.T. Stop, Tail, Turn and Clearance
Wire Harness	16 Ga. 5-Way Double Insulated Harness with 7 way plug
D-Rings	3" Standard D-Rings
Finishing Coat/Primer	Sherwin-Williams Powdura OneCure, Primer w/Polyester TGIC Gloss Powder Topcoat
Finish (prep)	Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
Color	Black

Available Sizes

LENGTH	WEIGHT
80" X 16'	2,743 lbs.
80" X 18'	2,873 lbs.
80" X 20'	3,019 lbs.
80" X 22'	3,165 lbs.
*[Base Weight Estimate Only]	
Deck Height - "	


Available Options

2 - 7,000 lbs. Dexter Nev-R Adjust Brake Axles
Axles available in Straight, Electric & Hydraulic
ST235/85 R16 LRG 14 Ply. Tires
215-75R-175H-1 Tires
Coupler 2-5/16" Adjustable Hyd.
Coupler 2-5/16" Adjustable 6 Hole
Coupler Pintle Ring 3" Adjustable 4 & 6 Hole
Diamond Plate Steel Floor
Rough Oak Floor
Douglas Fir Wood Floor
Blackwood Lumber Floor
MAX Ramps w/Dove
Fold Up Ramps 5' x 16"
3rd. Fold Up Ramp 5' x 16"
Slide-In Ramps 6' x 13"
Rear Slide-IN Ramps 5' x 13" (Standard 18'+)
4', 5' & 6' HD Fold Gate w/Ramp & Springs
4', 5' & 6' HD Split Fold Gate w/Ramp & Springs
6' Stand Up Ramps w/Center Gate & Springs
Double Hinges for 2 or 3 Ramps
12" & 16" Cross-Members
1 or 2-10K Spring Loaded Drop Leg Jacks
1 or 2-10K Hyd. Jacks w/Solar Panel Charger
LED Back Up Lights
LED Single & Dual Row Light Bar
3" & 4" Weld On D-Rings
4" Recessed 360 Rotational Bolt On D-Rings
Mud Flaps
Front Tongue Mount Tool Box w/Gas Shock
Winch Plate
12K, 15K and 17.5K Winch Package
Wet Bolt Kit Equalizer Lubrication
2 - Rear Support Stands (5K or 7K Jacks)
2 - Rear Support Tubing Stands
1 - MAX Side Step
Spare Tires
Weld-On & Removable Spare Tire Mount

Sport Carhauler

CZ

Available GVWR:  
7,000  
9,990

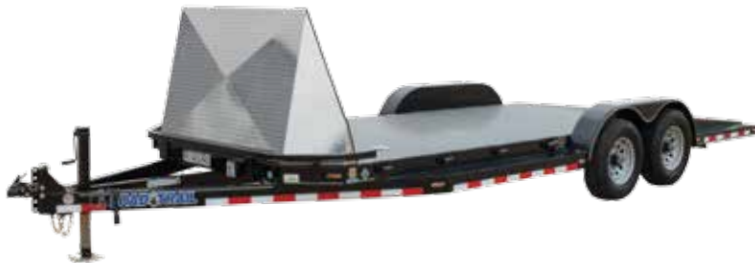

Stock photo. May be shown with optional equipment.

STANDARD FEATURES

GVWR:	7,000 lb
GAWR:	3,500 Lb (ea axle)
Couplers	2" Adjustable
Safety Chains	7,600 Lb 5/16 X 29 G#30
Jack	5,000 Lb Top Wind Swivel Jack
Axles	2-3,500 Lb Cambered Dexter Spring 1 Elec. Brake Forward Adjusting
Wheels	15" 5-Hole
Tires	205/75 R15 LRC
Suspension	Multi-Leaf Spring
Tongue_Neck	5" Channel (6.7 lbs/ft)
Frame	5" Channel (6.7 lbs/ft)
Uprights	2" X 2" 1/8" Tubing
Crossmembers	3" Channel 16" OC (3.5 lbs/ft)
Flooring	Steel Floor
Fenders	Smooth Plate Weld-On
Ramps	5' Slide-In Ramps
Top Rail	2" X 2" 1/8" Tubing
Lights	LED D.O.T. Stop, Tail, Turn and Clearance
Wire Harness	16 Ga. 5-Way Double Insulated Harness w/ Cold Weather Cord 7-way plug
D-Rings	4 - D-Rings 4" Recessed 360 Rotational Bolt On
Finishing Coat/Primer	Sherwin-Williams Powdura OneCure, Primer w/Polyester TGIC Gloss Powder Topcoat
Finish (prep)	Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
Color	Black

Available Sizes

LENGTH	WEIGHT
83" X 18'	2,500 lbs.
83" X 20'	2,670 lbs.
83" X 22'	2,840 lbs.
*[Base Weight Estimate Only]	
Deck Height - "	

Available Options

2 - 3,500 lbs. Dexter Nev-R Adjust Brake Axles
2 - 5,200 lbs. Dexter Nev-R Adjust Brake Axles
Axles available in Straight, Electric & Hydraulic
ST225/75 R15 LRD 8 Ply. Tires
ST235/80 R16 LRE 10 Ply. Tires
ST235/85 R16 LRG 14 Ply. Tires
Coupler 2" A-Frame Cast Hyd.
Coupler 2-5/16" Adjustable 4 & 6 Hole
Coupler 2-5/16" Adjustable Hyd.
Coupler 2-5/16" Adjustable 6 Hole
Coupler Pintle Ring 3" Adjustable 6 Hole
12" Cross-Members
Jack Drop Leg 7000 lb.
LED Back Up Lights
LED Single & Dual Row Light Bar
Mini LED Deck Lights
4" Recessed 360 Rotational Bolt On D-Rings
Aluminum Trim Package
42" Aluminum Front Stone Guard
4 - Additional Stake Pockets
Spare Tires
Front Tongue Mount Tool Box w/Gas Shock
Weld-On & Removable Spare Tire Mount
Winch Plate
12K, 15K and 17.5K Winch Package



For a complete list of options available for this model, go to [www.loadtrail.com](http://www.loadtrail.com)




For a complete list of options available for this model, go to [www.loadtrail.com](http://www.loadtrail.com)



Equipment Bobcat Hauler

BC

Available GVWR:  
9,990  
14,000

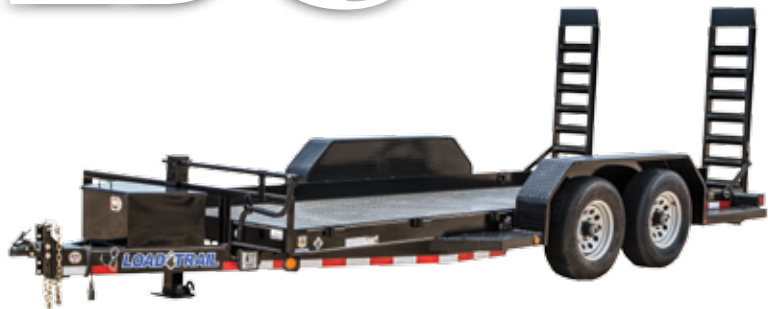

Stock photo. May be shown with optional equipment.

STANDARD FEATURES

GVWR:	9,990 lb
GAWR:	5,200 Lb (ea axle)
Couplers	2-5/16" Adjustable
Safety Chains	12,600 Lb 1/4 x 28 G#70
Jack	1-10K Drop Leg Spring Return
Axles	2-5,200 Lb Drop Cambered Dexter Spring 1 Elec Brake Forward Adjusting
Wheels	16" 6-Hole Silver Mod
Tires	235/80 R16 LRE
Suspension	Multi-Leaf Spring
Tongue_Neck	6" Channel (8.2 lbs/ft)
Frame	4" x 6" Angle Iron
Uprights	2" x 2" x 3/16" Angle Iron
Crossmembers	3" Channel 16" OC (3.5 lbs/ft)
Running Boards	1/8" Diamond Plate
Tool Box	Front Tongue Mount
Flooring	1/8" Diamond Plate
Fenders	Weld On Diamond Plate
Ramps	16" x 5' Fold-Up Ramps
Top Rail	2" x 2" x 1/8" Tubing
Lights	LED D.O.T. Stop, Tail, Turn and Clearance
Wire Harness	16 Ga. 5-Way Double Insulated Harness w/ Cold Weather Cord 7-way plug
D-Rings	3" Standard D-Rings
Finishing Coat/Primer	Sherwin-Williams Powdura OneCure, Primer w/Polyester TGIC Gloss Powder Topcoat
Finish (prep)	Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
Color	Black

Available Sizes

LENGTH	WEIGHT
80" X 12'	2,581 lbs.
80" X 14'	2,832 lbs.
80" X 16'	2,945 lbs.
80" X 18'	3,142 lbs.
80" X 20'	3,456 lbs.
*[Base Weight Estimate Only]	
Deck Height - "	

Available Options

2 - 5,200 lbs. Dexter Nev-R Adjust Brake Axles
2 - 7,000 lbs. Dexter Nev-R Adjust Brake Axles
Axles available in Drop, Electric & Hydraulic
ST235/85 R16 LRG 14 Ply. Tires
215-75R-175H-1 Tires
Coupler 2-5/16" Adjustable Hyd.
Coupler 2-5/16" Adjustable 6 Hole
Coupler Pintle Ring 3" Adjustable 6 Hole
Wet Bolt Kit Equalizer Lubrication
Diamond Plate Removable Fenders
3rd. Fold Up Ramp 5' x 16"
12" Cross-Members
Jack Spring Loaded Drop Leg 2-10K
2-10K Spring Loaded Drop Leg Jacks
1 or 2-10K Hyd. Jacks w/Solar Panel Charger
Double Hinges for 2 or 3 Ramps
LED Back Up Lights
LED Single & Dual Row Light Bar
3" & 4" Weld On D-Rings
4" Recessed 360 Rotational Bolt On D-Rings
Mud Flaps
Rub Rail
4 - Additional Stake Pockets
Spare Tires
Weld-On & Removable Spare Tire Mount
Winch Plate
12K, 15K and 17.5K Winch Package

Carhauler with Channel Frame/Side Rails

CS

Available GVWR:  
9,990  
14,000  
21,000



Stock photo. May be shown with optional equipment.

STANDARD FEATURES

GVWR:	9,990 lb
GAWR:	5,200 Lb (ea axle)
Couplers	2-5/16" A-Frame Stamped
Safety Chains	12,600 Lb 1/4 x 28 G#70
Jack	5,000 Lb Swivel
Axles	2-5,200 Lb Cambered Dexter Spring 1 Elec. Brake Forward Adjusting
Wheels	15" 6-Hole
Tires	225/75 R15 LRD
Suspension	Multi-Leaf Spring
Tongue_Neck	5" Channel (6.7 lbs/ft)
Frame	5" Channel (6.7 lbs/ft)
Uprights	2" X 2" 3/16" Angle Iron
Crossmembers	3" Channel 24" OC (3.5 lbs/ft)
Flooring	Treated Wood
Fenders	Weld-On Diamond Plate
Ramps	5' Slide-In Ramps
Top Rail	3" Pipe
Lights	LED D.O.T. Stop, Tail, Turn and Clearance
Wire Harness	16 Ga. 5-Way Double Insulated Harness w/ Cold Weather Cord 7-way plug
D-Rings	3" Standard D-Rings
Finishing Coat/Primer	Sherwin-Williams Powdura OneCure, Primer w/Polyester TGIC Gloss Powder Topcoat
Finish (prep)	Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
Color	Black

Available Sizes

LENGTH	WEIGHT
83" X 12'	2,284 lbs.
83" X 14'	2,466 lbs.
83" X 16'	2,664 lbs.
83" X 18'	2,855 lbs.
83" X 20'	3,048 lbs.
83" X 22'	3,286 lbs.
83" X 24'	3,845 lbs.
*[Base Weight Estimate Only]	
*[Some sizes not available with different axle ratings.]	
Deck Height - "	

Also available in 102" Wide\*

Available Options

2 - 5,200 lbs. Dexter Nev-R Adjust Brake Axles
2 or 3 - 7,000 lbs. Dexter Nev-R Adjust Brake Axles
Axles available in Straight, Electric & Hydraulic
ST235/80 R16 LRE 10 Ply. Tires
ST235/85 R16 LRG 14 Ply. Tires
215-75R-175H-1 Single Tires
Coupler 2-5/16" Adjustable 4 & 6 Hole
Coupler 2-5/16" Adjustable Hyd.
Coupler 2-5/16" Adjustable Flat Mount Turtle
Coupler Pintle Ring 3" Adjustable 4 & 6 Hole
6" Channel Frame (standard with 7K Axles)
8" Channel Frame (standard on 24'+)
2', 3' & 4' Dove Tails
Diamond Plate On Dove Tail
Diamond Plate Steel Floor
Rough Oak Floor
Douglas Fir Wood Floor
Blackwood Lumber Floor
Wet Bolt Kit Equalizer Lubrication
Diamond Plate Removable Fenders
Diamond Plate Alum. Tear Drop Removable Fenders
Drive Over Weld-On Fenders
Fork Holders
4', 5' & 6' HD Fold Gate w/Ramp & Springs
4', 5' & 6' HD Split Fold Gate w/Ramp & Springs
6' Stand Up Ramps w/Center Gate & Springs
Fold Up Ramps 5' x 16"
3rd. Fold Up Ramp 5' x 16"
MAX Ramps w/Dove
Slide-In Ramps 6' x 13"
Rear Slide-IN Ramps 5' x 13" (Standard 18'+)
12" & 16" Cross-Members
Jack Drop Leg 7000 lb.
1-10K Spring Loaded Drop Leg Jack
2-10K Spring Loaded Drop Leg Jacks (standard on 24'+)
1 or 2-10K Hyd. Jacks w/Solar Panel Charger
Double Hinges for 2 or 3 Ramps
LED Back Up Lights
LED Single & Dual Row Light Bar
3" & 4" Weld On D-Rings
4" Recessed 360 Rotational Bolt On D-Rings
Mud Flaps
2-3/8" Pipe Top Weld-On or Removable Side Rails
Sq. Tube Weld-On or Removable Side Rails
16", 24", 36" & 48" Exp. Metal or Solid Metal Sides
Running Boards
Rub Rail
2 - Rear Support Stands (5K or 7K Jacks)
2 - Rear Support Tubing Stands
1 - MAX Side Step
4 - Additional Stake Pockets
Spare Tires
Front Tongue Mount Tool Box w/Gas Shock
Weld-On & Removable Spare Tire Mount
Winch Plate
12K, 15K and 17.5K Winch Package



For a complete list of options available for this model, go to [www.loadtrail.com](http://www.loadtrail.com)



For a complete list of options available for this model, go to [www.loadtrail.com](http://www.loadtrail.com)