


OPEN RANGE



Highland
RIDGE RV

Own the Outdoors

CONVENTIONAL TRAVEL TRAILERS

SINGLE AXLE



OT171RD



OT182RB




OT180BHS



OT198H



OT20FBS

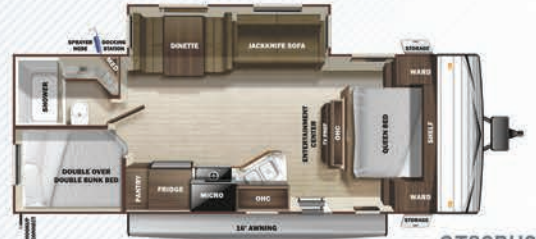

OT26BHS



OT20MB



OT27BHS



OT21FB



OT27RLI



OT21RBS



OT282BH



OT23RLS



OT26BH



OT32BHS

DUAL AXLE

FLOORPLANS

FEATURES

STANDARDS

OPTIONS

- » Magnum Roof System
- » Fiberglass Insulation
- » Pocket Screwed Lumbercore Cabinet Construction
- » Linoleum Throughout
- » 5/8" Main Floor Decking
- » PVC Roofing Membrane (15 Year Warranty/Non-Prorated)
- » Gas DSI Water Heater
- » Black Front Diamond Plating
- » 120V G.F.C.I Protected Exterior Receptacle
- » Bumper with Drain Hose Carrier & End Caps
- » Omni-Directional Digital TV/AM/FM Antenna with Powered Amplifier
- » Electric Brakes
- » Nitrogen Filled Tires
- » Solar Prep
- » Tinted Safety-Glass Windows
- » Wide Entrance Doors with Screen Door & Window
- » Galvanized Steel Wheel Wells
- » (2) 30lb. LP Bottles with Bottle Cover (Dual Axle Models)
- » 20lb. LP Bottle (Single Axle Models)
- » Power Awning with LED Lighting & Integrated Speakers
- » Stabilizer Jacks
- » Power Tongue Jack (Dual Axle Models)
- » Spare Tire with Carrier
- » Docking Station with Tank Flush (Dual Axle Models)
- » EZ-Store Detachable Power Cord
- » 12V CD/DVD Stereo with USB Input
- » Double-Over-Double Bunk Bed with 600lb. Capacity
- » 12V Powered Bathroom Vent
- » Shower Surround
- » Stainless Steel Appliances
- » 3 Bumer Cooktop with 17" Oven & Microwave (Dual Axle Models)
- » Heated Enclosed Underbelly (Dual Axle Models)
- » Magnet Catches for Baggage Doors
- » Rubber LP Lines
- » Pet Friendly
- » No Heat Registers in Floor
- » Pet Tie Out with Bottle Opener (Dual Axle Models)
- » MyPillow® Pet Bed (Dual Axle Models)
- » 15K BTU Air Conditioner (Dual Axle Models)
- » 50 amp service with 2nd 13.5K A/C (Select Dual Axle Models)

SPECIFICATIONS

	OT171RD**	OT180BHS**	OT182RB**	OT198H**	OT20FBS	OT20MB	OT21FB	OT21RBS	OT23RLS	OT26BH	OT26BHS	OT27BHS	OT27RLI	OT282BH	OT32BHS
Square Feet	145	159	153	TBD	165	TBD	174	221	220	203	249	263	300	269	TBD
Unloaded Vehicle Weight (lbs.)	3,445	3,735	3,515	TBD	4,280	TBD	4,275	5,660	5,420	4,735	5,725	6,255	7,195	6,410	TBD
Dry Hitch Weight (lbs.)	395	375	345	TBD	400	TBD	545	575	690	585	720	775	1,035	610	TBD
Gross Vehicle Weight Rating (GVWR)	4,500	4,900	4,250	TBD	6,000	5,250	6,000	7,200	6,500	6,500	7,500	8,500	8,995	8,500	TBD
Cargo (Gross)	1,055	1,165	735	TBD	1,720	TBD	1,725	1,540	1,080	1,765	1,775	2,245	1,800	2,090	TBD
Exterior Length (Pin to Rear)	21' 8"	22' 0"	22' 9"	22' 2"	23' 6"	24' 4"	25' 7"	27' 3"	29' 1"	29' 4"	30' 7"	31' 9"	33' 10"	32' 5"	36' 5"
Exterior Height	10' 2"	10' 3"	10' 2"	TBD	10' 6"	TBD	10' 6"	10' 9"	11' 0"	10' 6"	11' 1"	11' 4"	11' 2"	11' 3"	TBD
Exterior Width	8' 0"	8' 0"	8' 0"	8' 0"	8' 0"	8' 0"	8' 0"	8' 0"	8' 0"	8' 0"	8' 0"	8' 0"	8' 0"	8' 0"	8' 0"
Exterior Width (Slides Out)	N/A	10' 0"	N/A	N/A	9' 5"	N/A	N/A	10' 11"	10' 11"	N/A	11' 0"	11' 0"	13' 0"	11' 0"	10' 11"
Interior Height	6' 9"	6' 9"	6' 9"	6' 9"	6' 9"	6' 9"	6' 9"	6' 9"	6' 9"	6' 9"	6' 9"	6' 9"	6' 9"	6' 9"	6' 9"
Fresh Water Capacity (Gal.)*	26	26	26	26	48	48	48	48	48	48	48	48	48	48	48
Gray Waste Water Capacity (Gal.)	19.9	19.9	19.9	32.5	32.5	32.5	32.5	65	32.5	32.5	32.5	32.5	40	65	32.5
Black Waste Water Capacity (Gal.)	19.9	19.9	19.9	32.5	32.5	32.5	32.5	32.5	32.5	32.5	32.5	32.5	32.5	32.5	32.5
LP Capacity (lbs.)	20	20	20	20	60	60	60	60	60	60	60	60	60	60	60
Tire Size	14"	15"	14"	15"	14"	14"	14"	14"	14"	14"	15"	15"	15"	15"	15"
Awning Size	9'	11'	11'	13'	12'	15'	16'	19'	19'	19'	16'	18'	20'	20'	20'

*Includes Water Heater

**Single Axle Models

1 SLIDE OUTS

- » Exterior slide out walls built with studs 16" on center
- » Residential fiberglass insulation full wall
- » Laminated metal endwalls with residential fiberglass insulation

2 DOORS & LOCKS

- » Dark tinted safety glass
- » Full-width entrance door with screen and window
- » Baggage and storage doors with magnetic latches

3 ROOF

- » Strength tested Magnum Roof System- 50% stronger than the competition with 4,500lb. rating
- » 3/8" residential decking with residential fiberglass insulation
- » Sealed with seamless one-piece material that is 30% lighter, reflects heat and has an embossed finish.

4 FLOORS

- » Wood reinforced framed construction 16" on center perpendicular to frame crossmembers
- » Built-in galvanized wheel wells
- » Insulated with residential fiberglass insulation, anti-puncture moisture barrier woven underbelly material wrapped around floor

5 SIDEWALLS


- » Exterior walls with studs 16" on center for consistency and strength
- » Residential fiberglass insulation secured in between each stud for maximum efficiency
- » Superior metal—thicker than average metal with S-locking design for maximum rigidity

6 MAIN BODY

- » Aluminum wheels with nitrogen filled tires
- » Structural steel I-beam with stamped cross members for added strength
- » Wide-stance axles for stability with various size axles based on model
- » Flexible LP gas lines for longevity and durability

7 HEATING SYSTEM

- » High efficiency furnace provides heat down to the fully enclosed underbelly*
- » Holding tanks are warmed by the forced air heat which helps prevent freeze-ups

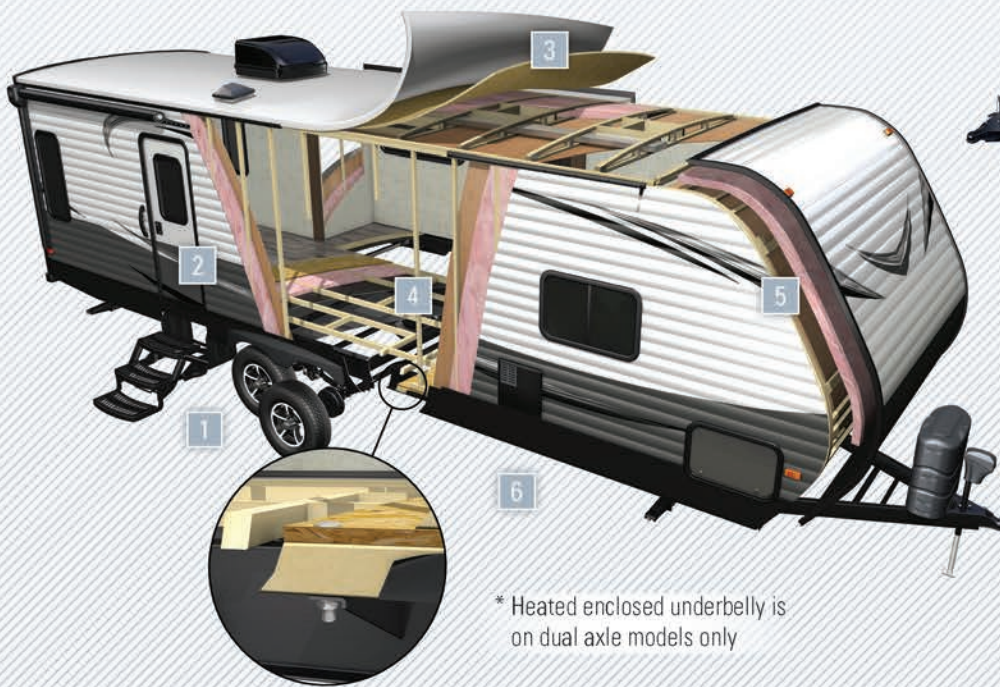

* Heated enclosed underbelly is on dual axle models only

Your Open Range Dealer:



For more information visit us at:
www.HighlandRidgeRV.com