

The ETZ Bumper Pull Equipment Tilt Trailer offers effortless loading and heavy-duty hauling with its 16' gravity tilt deck and 13° tilt angle. Available in 20' - 24' lengths, it features an 83" or 102" wide deck, torsion axles (7K or 8K), and a GVWR up to 17,000 lbs. Built on a robust 8" I-Beam frame, it includes removable fenders, D-rings, rub rails, and a mega lockable toolbox.

## **STANDARD FEATURES**

TRAILER SPEC	CS:
DIMENSIONS:	
AVAILABLE LENGTHS:	20', 22', 24'
DECK WIDTH:	83", 102"
DECK HEIGHT:	22"
WEIGHT RATING:	
AXLE COUNT:	2
GAWR:	7,000 lbs, 8,000 lbs
GVWR:	15,200 lbs, 17,000 lbs
FINISH:	
PAINT TYPE:	Powdercoat
PREP:	Steel Grit Blasted
COLORS:	Military Green, Desert Tan, Flame Orange,
	Midnight Black, Spectra Yellow, Blue Horizon,
	Lime Green, Ash Grey, True Red, Pearl White,
	Cloud Grey, Navy Blue, Sunset Orange
WARRANTY:	
AXLE WARRANTY:	11 Year Lippert Torsion Axle Warranty
TRAILER WARRANTY:	Three (3) Year Frame
	One (1) Year Parts Warranty

WELD ON SPARE TIRE MOUNT


ROBUST

TOOLBOX

LATCH

MEGA

TOOLBOX

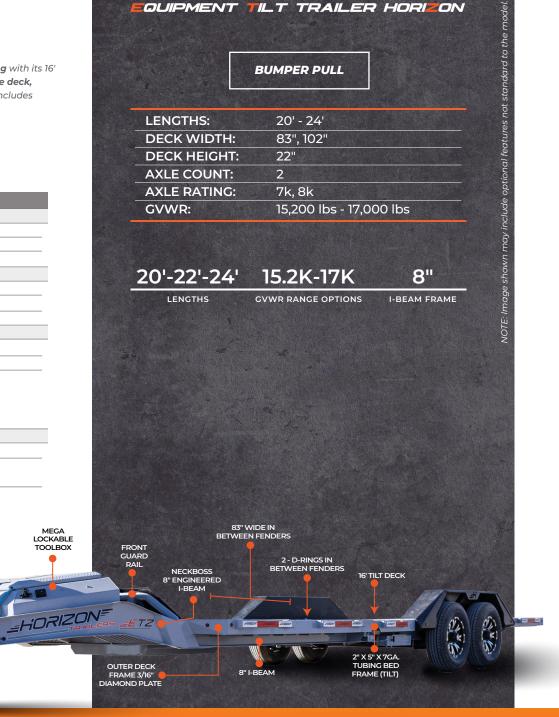





LENGTH: 60"  SPARE: Weld On Spot Winch Plate: Winch Plate: Winch Plate: Winch Plate: COUPLER: STANDARD COUPLER: Adjustable A JACKS: FRONT JACK: 1 Side Wind: TOOLBOX: Mega Locka: SAFETY: SAFETY CHAINS: 3/8" Grade 7 CHASSIS: FRAME: 15.2K GVWR MAIN FRAME: 8" I-Beam (ISDECK: BED: DECK FRAME 102" WIDE DECK: 3/16 FLOORING: Pine Lumber: CROSSMEMBERS: 3" Channel (ISDECK WIDTH: 83", 102" WIDTH BETWEEN FENDERS: 83" (Applys FWELD ON D-RINGS: 2 - D-Rings II BOUT ON SWIVEL D-RINGS: 2 - Flush Mount: TIE DOWN SLOTS 83" Slots for Late: WIDE DECK: Sides Of Deck: TILT DECK LENGTH: 16' TILT DECK FRAME: 13° SIDES: RUB RAIL: 2" x 3/8" Rub STAKE POCKETS: 1,5/8" x 3,5/8" Rub	
LENGTH: 60"  SPARE: Weld On Spot Winch Plate:  COUPLER:  STANDARD COUPLER: Adjustable Ad	
SPARE: Weld On Spot Winch Plate: Winch Plate COUPLER: STANDARD COUPLER: Adjustable A JACKS: FRONT JACK: 1 Side Wind: TOOLBOX: Mega Locka SAFETY: SAFETY CHAINS: 3/8" Grade 7 CHASSIS: FRAME: 15.2K GVWR MAIN FRAME: 8" I-Beam (III) 17K GVWR MAIN FRAME: 8" I-Beam (III) 18T GVWR MAIN FRAME: 2-D-Rings (III) 18T GVWR MAIN FRAME: 2-D-Rings (III) 18T GVWR MAIN FRAME: 8" I-Beam (III) 18T GVWR MAIN FRAME: 2-D-Rings (III) 18T GVWR MAIN FRAME: 2-D-Rings (III) 18T GVWR MAIN FRAME: 8" I-Beam (III) 18T G	ingineered I-Beam
WINCH PLATE: Winch Plate  COUPLER:  STANDARD COUPLER: Adjustable A  JACKS: FRONT JACK: 1 Side Wind: TOOLBOX: Mega Locka  SAFETY: SAFETY CHAINS: 3/8" Grade 7  CHASSIS: FRAME: 15.2K GVWR MAIN FRAME: 8" I-Beam (III) 17K GVWR MAIN FRAME: 8" I-Beam (III) 18	
COUPLER:  STANDARD COUPLER:  Adjustable A  JACKS:  FRONT JACK:  1 Side Wind:  TOOLBOX:  Mega Locka  SAFETY:  SAFETY CHAINS:  3/8" Grade 7  CHASSIS:  FRAME:  15.2K GVWR MAIN FRAME:  15.2K GVWR MAIN FRAME:  8" I-Beam (IS  DECK:  BED:  DECK FRAME 102" WIDE DECK:  JECK WIDTH:  DECK WIDTH:  WIDTH BETWEEN FENDERS:  WELD ON D-RINGS:  JECK WIDTH:  WIDTH BETWEEN FENDERS:  WELD ON D-RINGS:  JECK WIDTH:  WIDTH BETWEEN FENDERS:  WIDTH BETWEEN FENDERS:  JECK WIDTH:  JECK WID	re Tire Mount
STANDARD COUPLER: Adjustable A  JACKS: FRONT JACK: 1 Side Wind: TOOLBOX: TOOLBOX: Mega Locka  SAFETY: SAFETY CHAINS: 3/8" Grade 7  CHASSIS: FRAME: 15.2K GVWR MAIN FRAME: 8" I-Beam (III) 17K GVWR MAIN FRAME: 8" I-Beam (III) 18	Behind Neck
JACKS:  FRONT JACK:  1 Side Wind:  TOOLBOX:  TOOLBOX:  Mega Locka  SAFETY:  SAFETY CHAINS:  JAB" Grade 7  CHASSIS:  FRAME:  15.2K GVWR MAIN FRAME:  15.2K GVWR MAIN FRAME:  BED:  DECK:  BED:  DECK FRAME 102" WIDE DECK:  JABE  CROSSMEMBERS:  DECK HEIGHT:  DECK WIDTH:  WIDTH BETWEEN FENDERS:  BOLT ON SWIVEL D-RINGS:  TIE DOWN SLOTS 83"  WIDE DECK:  TIE DOWN SLOTS 83"  WIDE DECK:  TILT DECK LENGTH:  TILT DECK LENGTH:  TILT DECK FRAME:  TILT ANGLE:  SIDES:  RUB RAIL:  STAKE POCKETS:  JAB" Grade 7  Mega Locka  AB" Grade 7  I-Beam (II)  3/16  FI-Beam (II)  3/16  FI-Beam (II)  3/16  FI-Beam (II)  3/16  FI-Beam (II)  3/16  S'I-Beam (II)  3/16  FI-Beam (II)  3/16	
FRONT JACK: 1 Side Wind:  TOOLBOX: TOOLBOX: Mega Locka  SAFETY: SAFETY CHAINS: 3/8" Grade 7  CHASSIS: FRAME: 15.2K GVWR MAIN FRAME: 8" I-Beam (IIII) 17K GVWR MAIN FRAME: 8" I-Beam (IIIII) 17K GVWR MAIN FRAME: 8" I-Beam (IIIII) 17K GVWR MAIN FRAME: 8" I-Beam (IIIIII) 17K GVWR MAIN FRAME: 8" I-Beam (IIIIIIII) 18" I-Beam (IIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII	ito Latch 2-5/16" Вр Coupler (17,000 lb
TOOLBOX:  TOOLBOX:  TOOLBOX:  Mega Locka  SAFETY:  SAFETY CHAINS:  J/8" Grade 7  CHASSIS:  FRAME:  15.2K GVWR MAIN FRAME:  17K GVWR MAIN FRAME:  BED:  DECK:  BED:  DECK FRAME 102" WIDE DECK:  J/16  FLOORING:  Pine Lumber  CROSSMEMBERS:  J" Channel (I)  DECK WIDTH:  B3", 102"  WIDTH BETWEEN FENDERS:  WELD ON D-RINGS:  PORING:  BOLT ON SWIVEL D-RINGS:  TIE DOWN SLOTS 83"  WIDE DECK:  TIE DOWN SLOTS 83"  WIDE DECK:  TIE DOWN SLOTS 102"  WIDE DECK:  TILT DECK LENGTH:  TILT DECK FRAME:  TILT DECK FRAME:  TILT ANGLE:  SIDES:  RUB RAIL:  SY8" Rub  STAKE POCKETS:  1,5/8" x 3,5/8" Rub	
TOOLBOX: Mega Locka  SAFETY:  SAFETY CHAINS: 3/8" Grade 7  CHASSIS:  FRAME:  15.2K GVWR MAIN FRAME: 8" I-Beam (III)  DECK:  BED:  DECK FRAME 102" WIDE DECK: 3/16  FLOORING: Pine Lumber  CROSSMEMBERS: 3" Channel (III)  DECK WIDTH: 83", 102"  WIDTH BETWEEN FENDERS: 83" (Applys Fine Mount of Mount of Deck in the Mount of Deck	oring Loaded Drop Jack Leg (12,000 lk
SAFETY:  SAFETY CHAINS: 3/8" Grade 7  CHASSIS:  FRAME:  15.2K GVWR MAIN FRAME: 8" I-Beam (III)  DECK:  BED:  DECK FRAME 102" WIDE DECK: 3/16  FLOORING: Pine Lumber:  CROSSMEMBERS: 3" Channel (III)  DECK WIDTH: 83", 102"  WIDTH BETWEEN FENDERS: 83" (Applys Fine Mount of Deck (III)  WIDTH BETWEEN FENDERS: 2 - D-Rings III  BOUN SWIVEL D-RINGS: 2 - Flush Mount of Deck (III)  WIDE DECK: End Of Deck (III)  TIE DOWN SLOTS 83" Slots for Late (III)  WIDE DECK: Sides Of Deck (IIII)  TILT DECK LENGTH: 16'  TILT DECK FRAME: 2" x 5" x 7ga.  TILT ANGLE: 13°  SIDES:  RUB RAIL: 2" x 3/8" Rub STAKE POCKETS: 1,5/8" x 3,5/8"	
SAFETY CHAINS: 3/8" Grade 7 CHASSIS: FRAME:  15.2K GVWR MAIN FRAME: 8" I-Beam (II: 17K GVWR MAIN FRAME: 8" I-Beam (II: 17K GVWR MAIN FRAME: 8" I-Beam (II: DECK: BED: DECK FRAME 102" WIDE DECK: 3/16 FLOORING: Pine Lumber CROSSMEMBERS: 3" Channel (II: DECK HEIGHT: 22" DECK WIDTH: 83", 102" WIDTH BETWEEN FENDERS: 83" (Applys Fine Limits of the company	le Toolbox
FRAME:  15.2K GVWR MAIN FRAME: 8" I-Beam (IIII)  17K GVWR MAIN FRAME: 8" I-Beam (IIII)  DECK:  BED:  DECK FRAME 102" WIDE DECK: 3/16  FLOORING: Pine Lumber: 102" Pine Lumber: 103" Pine Lumber:	
FRAME:  15.2K GVWR MAIN FRAME: 8" I-Beam (IIII)  17K GVWR MAIN FRAME: 8" I-Beam (IIII)  DECK:  BED:  DECK FRAME 102" WIDE DECK: 3/16  FLOORING: Pine Lumber: 102" Pine Lumber: 103" Pine Lumber:	Safety Chain w/Clevis Hook (2 each)
FRAME:  15.2K GVWR MAIN FRAME: 8" I-Beam (IIII)  17K GVWR MAIN FRAME: 8" I-Beam (IIII)  DECK:  BED:  DECK FRAME 102" WIDE DECK: 3/16  FLOORING: Pine Lumber (IIII)  CROSSMEMBERS: 3" Channel (IIII)  DECK HEIGHT: 22"  DECK WIDTH: 83", 102"  WIDTH BETWEEN FENDERS: 83" (Applys Fine Line Mount of Line	
17K GVWR MAIN FRAME: 8" I-Beam (ISDECK:  BED:  DECK FRAME 102" WIDE DECK: 3/16  FLOORING: Pine Lumber CROSSMEMBERS: 3" Channel (ISDECK HEIGHT: 22"  DECK WIDTH: 83", 102"  WIDTH BETWEEN FENDERS: 83" (Applys FRAME) WELD ON D-RINGS: 2 - D-Rings IN BOLT ON SWIVEL D-RINGS: 2 - Flush Mount TIE DOWN SLOTS 83" Slots for Late WIDE DECK: End Of Deck TIE DOWN SLOTS 102" Slots for Late WIDE DECK: Sides Of Dec TILT DECK LENGTH: 16' TILT DECK FRAME: 2" x 5" x 7ga. TILT ANGLE: 13°  SIDES: RUB RAIL: 2" x 3/8" Rub STAKE POCKETS: 1,5/8" x 3,5/8"	
DECK:  BED:  DECK FRAME 102" WIDE DECK: 3/16  FLOORING: Pine Lumber CROSSMEMBERS: 3" Channel (I.  DECK HEIGHT: 22"  DECK WIDTH: 83", 102"  WIDTH BETWEEN FENDERS: 83" (Applys R WELD ON D-RINGS: 2 - D-Rings II  BOLT ON SWIVEL D-RINGS: 2 - Flush Mount TIE DOWN SLOTS 83" Slots for Late WIDE DECK: End Of Deck TIE DOWN SLOTS 102" Slots for Late WIDE DECK: Sides Of Dec TILT DECK LENGTH: 16'  TILT DECK FRAME: 2" x 5" x 7ga. TILT ANGLE: 13°  SIDES:  RUB RAIL: 2" x 3/8" Rub STAKE POCKETS: 1,5/8" x 3,5/8"	lbs/ft)
BED:  DECK FRAME 102" WIDE DECK: 3/16  FLOORING: Pine Lumber CROSSMEMBERS: 3" Channel (I.  DECK HEIGHT: 22"  DECK WIDTH: 83", 102"  WIDTH BETWEEN FENDERS: 83" (Applys R WELD ON D-RINGS: 2 - D-Rings II  BOLT ON SWIVEL D-RINGS: 2 - Flush Mount TIE DOWN SLOTS 83" Slots for Late WIDE DECK: End Of Deck TIE DOWN SLOTS 102" Slots for Late WIDE DECK: Sides Of Dec TILT DECK LENGTH: 16'  TILT DECK FRAME: 2" x 5" x 7ga. TILT ANGLE: 13°  SIDES: RUB RAIL: 2" x 3/8" Rub STAKE POCKETS: 1,5/8" x 3,5/8"	lbs/ft)
DECK FRAME 102" WIDE DECK: 3/16  FLOORING: Pine Lumber CROSSMEMBERS: 3" Channel (CONTROL CONTROL CONTR	
FLOORING: Pine Lumber CROSSMEMBERS: 3" Channel (I DECK HEIGHT: 22"  DECK WIDTH: 83", 102"  WIDTH BETWEEN FENDERS: 83" (Applys F WELD ON D-RINGS: 2 - D-Rings II BOLT ON SWIVEL D-RINGS: 2 - Flush Mount TIE DOWN SLOTS 83" Slots for Late WIDE DECK: End Of Deck TIE DOWN SLOTS 102" Slots for Late WIDE DECK: Sides Of Dec TILT DECK LENGTH: 16' TILT DECK FRAME: 2" x 5" x 7ga. TILT ANGLE: 13°  SIDES: RUB RAIL: 2" x 3/8" Rub STAKE POCKETS: 1,5/8" x 3,5/8"	
FLOORING: Pine Lumber CROSSMEMBERS: 3" Channel (I DECK HEIGHT: 22"  DECK WIDTH: 83", 102"  WIDTH BETWEEN FENDERS: 83" (Applys F WELD ON D-RINGS: 2 - D-Rings II BOLT ON SWIVEL D-RINGS: 2 - Flush Mount TIE DOWN SLOTS 83" Slots for Late WIDE DECK: End Of Deck TIE DOWN SLOTS 102" Slots for Late WIDE DECK: Sides Of Dec TILT DECK LENGTH: 16' TILT DECK FRAME: 2" x 5" x 7ga. TILT ANGLE: 13°  SIDES: RUB RAIL: 2" x 3/8" Rub STAKE POCKETS: 1,5/8" x 3,5/8"	Diamond Plate
DECK HEIGHT:         22"           DECK WIDTH:         83", 102"           WIDTH BETWEEN FENDERS:         83" (Applys R           WELD ON D-RINGS:         2 - D-Rings In           BOLT ON SWIVEL D-RINGS:         2 - Flush Mount           TIE DOWN SLOTS 83"         Slots for Late           WIDE DECK:         End Of Deck           TIE DOWN SLOTS 102"         Slots for Late           WIDE DECK:         Sides Of Dec           TILT DECK LENGTH:         16'           TILT DECK FRAME:         2" x 5" x 7ga.           TILT ANGLE:         13°           SIDES:           RUB RAIL:         2" x 3/8" Rub           STAKE POCKETS:         1,5/8" x 3,5/8"	Floor
DECK HEIGHT:         22"           DECK WIDTH:         83", 102"           WIDTH BETWEEN FENDERS:         83" (Applys R           WELD ON D-RINGS:         2 - D-Rings In           BOLT ON SWIVEL D-RINGS:         2 - Flush Mount           TIE DOWN SLOTS 83"         Slots for Late           WIDE DECK:         End Of Deck           TIE DOWN SLOTS 102"         Slots for Late           WIDE DECK:         Sides Of Dec           TILT DECK LENGTH:         16'           TILT DECK FRAME:         2" x 5" x 7ga.           TILT ANGLE:         13°           SIDES:           RUB RAIL:         2" x 3/8" Rub           STAKE POCKETS:         1,5/8" x 3,5/8"	50 lbs/ft) 16" Spacing
WIDTH BETWEEN FENDERS: 83" (Applys R WELD ON D-RINGS: 2 - D-Rings II BOLT ON SWIVEL D-RINGS: 2 - Flush Mount TIE DOWN SLOTS 83" Slots for Late WIDE DECK: End Of Deck TIE DOWN SLOTS 102" Slots for Late WIDE DECK: Sides Of Dec TILT DECK LENGTH: 16' TILT DECK FRAME: 2" x 5" x 7ga. TILT ANGLE: 13°  SIDES: RUB RAIL: 2" x 3/8" Rub STAKE POCKETS: 1,5/8" x 3,5/8"	
WELD ON D-RINGS: 2 - D-Rings II BOLT ON SWIVEL D-RINGS: 2 - Flush Mount TIE DOWN SLOTS 83" Slots for Late WIDE DECK: End Of Deck TIE DOWN SLOTS 102" Slots for Late WIDE DECK: Sides Of Dec TILT DECK LENGTH: 16' TILT DECK FRAME: 2" x 5" x 7ga. TILT ANGLE: 13°  SIDES: RUB RAIL: 2" x 3/8" Rub STAKE POCKETS: 1,5/8" x 3,5/8"	
BOLT ON SWIVEL D-RINGS: 2-Flush Mount TIE DOWN SLOTS 83" Slots for Late WIDE DECK: End Of Deck TIE DOWN SLOTS 102" Slots for Late WIDE DECK: Sides Of Dec TILT DECK LENGTH: 16' TILT DECK FRAME: 2" x 5" x 7ga. TILT ANGLE: 13°  SIDES: RUB RAIL: 2" x 3/8" Rub STAKE POCKETS: 1,5/8" x 3,5/8"	or 83" & 102" Wide Decks)
TIE DOWN SLOTS 83"         Slots for Late           WIDE DECK:         End Of Deck           TIE DOWN SLOTS 102"         Slots for Late           WIDE DECK:         Sides Of Dec           TILT DECK LENGTH:         16'           TILT DECK FRAME:         2" x 5" x 7ga.           TILT ANGLE:         13°           SIDES:         RUB RAIL:           STAKE POCKETS:         1,5/8" x 3,5/8"	Between Fenders
WIDE DECK:         End Of Deck           TIE DOWN SLOTS 102"         Slots for Late           WIDE DECK:         Sides Of Dec           TILT DECK LENGTH:         16'           TILT DECK FRAME:         2" x 5" x 7ga.           TILT ANGLE:         13°           SIDES:         RUB RAIL:           STAKE POCKETS:         1,5/8" x 3,5/8"	Galvanized Swivel D-Rings Front Of Trailer
TIE DOWN SLOTS 102"       Slots for Late         WIDE DECK:       Sides Of Dec         TILT DECK LENGTH:       16'         TILT DECK FRAME:       2" x 5" x 7ga.         TILT ANGLE:       13°         SIDES:       RUB RAIL:       2" x 3/8" Rub         STAKE POCKETS:       1,5/8" x 3,5/8"	On Tie Down Fittings Front
WIDE DECK:       Sides Of Dec         TILT DECK LENGTH:       16'         TILT DECK FRAME:       2" x 5" x 7ga.         TILT ANGLE:       13°         SIDES:       RUB RAIL:         STAKE POCKETS:       1,5/8" x 3,5/8"	
TILT DECK LENGTH: 16'  TILT DECK FRAME: 2" x 5" x 7ga.  TILT ANGLE: 13°  SIDES:  RUB RAIL: 2" x 3/8" Rub  STAKE POCKETS: 1,5/8" x 3,5/8"	n On Tie Down Fittings Along
TILT DECK FRAME:       2" x 5" x 7ga.         TILT ANGLE:       13°         SIDES:       2" x 3/8" Rub         STAKE POCKETS:       1,5/8" x 3,5/8"	
TILT ANGLE:       13°         SIDES:       2" x 3/8" Rub         STAKE POCKETS:       1,5/8" x 3,5/8"	
SIDES:           RUB RAIL:         2" x 3/8" Rub           STAKE POCKETS:         1,5/8" x 3,5/8"	ubing Bed Frame
RUB RAIL: 2" x 3/8" Rub STAKE POCKETS: 1,5/8" x 3,5/8"	
STAKE POCKETS: 1,5/8" x 3,5/8"	
	Rail
	(ID) Stake Pockets (Spaced At 24")
	Spools (Spaced At 24")
FENDERS 83" WIDE DECK: 12ga. Remov	ble Diamond Plate Steel Fenders
	d Plate Drive Over Fenders
FRONT:	
GUARD: Reinforced 2	

IYDRAULICS:	
SYSTEM:	Gravity Up / Down
CYLINDER:	1 - 3" x 16" Cylinder
TANK:	Large Reservoir
VALVE:	3 Way Valve Control
<b>RUNNING GEAR</b>	:
ΓIRES:	
7K AXLES:	Radial Tires ST235/80R16 10PR 3,520 lbs
8K AXLES:	Radial Tires ST235/85R16 14PR 4,400 lbs
RIMS:	16" Black Mod Wheels
AXLES:	
7K AXLE TYPE:	7k Lippert Electric Brake Auto Adjust EZ Lube
	Torsion Axles 8 On 6.5"
8K AXLE TYPE:	8k Lippert Electric Brake Auto Adjust Oil Bath
	Torsion Axles 8 On 6.5"
AXLE COUNT:	2 Axles
AXLE WARRANTY:	11 Year Lippert Torsion Axle Warranty
SUSPENSION:	
SUSPENSION TYPE:	Torsion
LECTRICAL AN	D LIGHTING:
BATTERY AND CHARGI	NG:
BREAKAWAY SYSTEM:	2382 Brightway Group Electric Breakaway Kit
WIRING HARNESS:	All-Weather Wiring Harness (7-Way RV)
FRAME WIRING:	Double Insulated Wiring Harness
LIGHTING:	
LIGHTS:	DOT Approved Tecniq LED Lights
SAFETY:	
REFLECTIVE TAPE:	3M Dot Compliant Reflective Tape



## **COLORS**:

COLORS

PAGE FOR AVAILABLE

ACTUAL COLOR MAY VARY, CHECK SPECIFIC MODEL

MILITARY GREEN

DESERT TAN

FLAME ORANGE

MIDNIGHT BLACK

SPECTRA YELLOW

BLUE HORIZON

> LIME GREEN

> > ASH GREY

TRUE RED

PEARL WHITE

CLOUD GREY

> NAVY BLUE

SUNSET ORANGE