



The **FHZ Gooseneck Flatdeck Hot Shot Trailer Horizon** is a tough, high-capacity flatdeck trailer engineered for demanding hauls, available in lengths from **20' to 44'** with a **102" wide deck** and **up to 30,000 lbs GVWR**. Built on a reinforced 12" I-beam frame with tandem 10K, 12K, or 16K Lippert axles, it includes 8' heavy-duty slide-in ramps, a winch-ready toolbox, and a 34" deck height for easy loading. The **FHZ** delivers strength, style, and reliability on every job.

STANDARD FEATURES

TRAILER SPECS:

DIMENSIONS:

AVAILABLE LENGTHS: 20', 22', 24', 26', 28', 30', 32', 34', 36', 38', 40', 42', 44'

DECK WIDTH: 102"

DECK HEIGHT: 34"

WEIGHT RATING:

AXLE COUNT: 2

GAWR: 10,000 lbs, 12,000 lbs, 16,000 lbs

GVWR: 25,000 lbs, 25,900 lbs, 30,000 lbs

FINISH:

PAINT TYPE: Powdercoat

PREP: Steel Grit Blasted

COLORS: Military Green, Desert Tan, Flame Orange, Midnight Black, Spectra Yellow, Blue Horizon, Lime Green, Ash Grey, True Red, Pearl White, Cloud Grey, Navy Blue, Sunset Orange

WARRANTY:


AXLE WARRANTY: 6 Year Lippert Spring Axle Warranty

TRAILER WARRANTY: Three (3) Year Frame

One (1) Year Parts Warranty



WELD ON SPARE
TIRE MOUNT

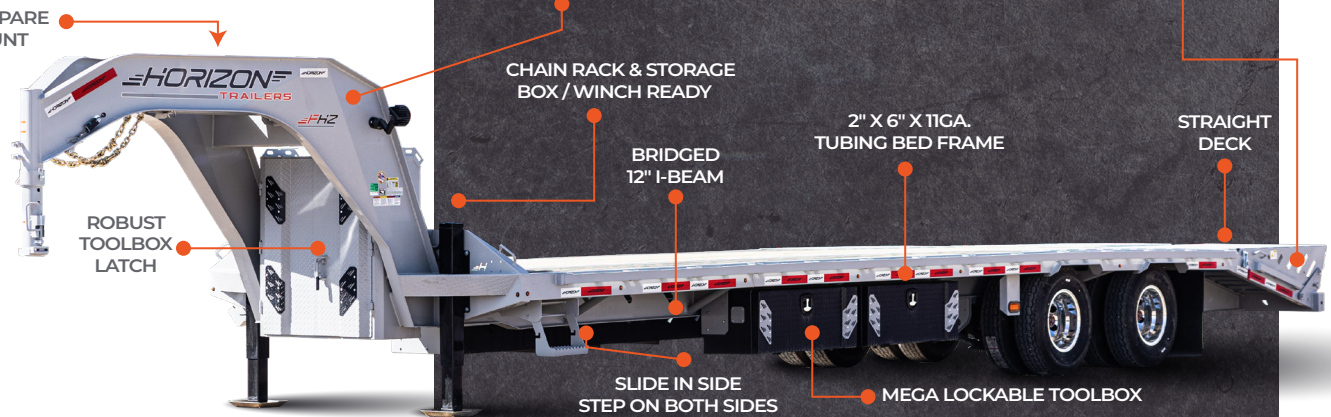

FLATDECK HOT SHOT TRAILER HORIZON

GOOSENECK

LENGTHS:	20' - 44'
DECK WIDTH:	102"
DECK HEIGHT:	34"
AXLE COUNT:	2
AXLE RATING:	10k, 12k, 16k DUALS
GVWR:	25,000 lbs - 30,000 lbs

20'-44'

LENGTHS

25K-30K

GVWR RANGE OPTIONS

12"

I-BEAM FRAME

NOTE: Image shown may include optional features not standard to the model.

EVERY. DETAIL. MATTERS.

TONGUE:

TONGUE:

TYPE:	Neckboss 12" Engineered I-Beam
LENGTH:	98" (From Behind Riser)
HEIGHT:	70" (From Underneath Neck)
SPARE:	Weld On Spare Tire Mount
STORAGE BEHIND NECK:	Chain Rack & Storage Box / Winch Ready

COUPLER:

STANDARD COUPLER: Adjustable 2-5/16" Gn Coupler (30,000 lbs)

JACKS:

FRONT JACKS: 2 Side Wind Spring Loaded Drop Jack Legs (12,000 lbs)

TOOLBOX:

TOOLBOX: Mega Lockable Toolbox

SAFETY:

SAFETY CHAINS: 3/8" Grade 70 Safety Chain w/Clevis Hook (2 each)

CHASSIS:

FRAME:

25K- 25.9K GVWR MAIN FRAME:	12" I-Beam (19 lbs/ft)
30K GVWR MAIN FRAME:	12" I-Beam (22 lbs/ft)
TORQUE TUBE 30' & UP ONLY:	4,1/2" Tube

DECK:

BED:

REAR OF DECK:	Straight Deck
DECK FRAME:	2" x 6" x 11ga. Tubing Bed Frame
FLOORING:	Pine Lumber Floor
CROSSMEMBERS:	3" Channel (3.50 lbs/ft) 16" Spacing
DECK HEIGHT:	34"
DECK WIDTH:	102"

SIDES:

RUB RAIL:	2" x 3/8" Rub Rail
STAKE POCKETS:	1,5/8" x 3,5/8" (ID) Stake Pockets (Spaced At 24")
SPOOLS:	2" x 10ga. Pipe Spools (Spaced At 24")
SIDES:	Slide In Side Step On Both Sides

REAR:

RAMPS:	Ramp Pockets w/ 8' Long Heavy Duty Slide In 4" Channel Ramps (5,000 LBS WHEEL RATING EACH ONLY OVER AREA OF 12" OR MORE)
--------	--

RUNNING GEAR:

TIRES:

10K - 12K AXLES:	ST235/80R16, Dual 10PR 3,080 lbs
RIMS:	16" Black Mod Wheels
16K AXLES:	ST235/75R17.5, Dual 18PR 5,675 lbs
RIMS:	17.5" Black Mod Wheels

AXLES:

10K AXLE TYPE:	10k Lippert Electric Brake Auto Adjust Dual Oil Bath Spring Axles 8 On 6.5"
12K AXLE TYPE:	12k Lippert Electric Brake Auto Adjust Dual Oil Bath Spring Axles 8 On 6.5"
16K AXLE TYPE:	16k Lippert Electric Brake Auto Adjust Dual Oil Bath Spring Axles 8 On 10.83"
AXLE COUNT:	2 Axles
AXLE WARRANTY:	6 Year Lippert Spring Axle Warranty

SUSPENSION:

10K - 12K AXLE SUSPENSION TYPE:	Universal Slipper Spring Hangers
16K AXLE SUSPENSION TYPE:	Heavy Duty Double Slipper Mechanical Suspension

ELECTRICAL AND LIGHTING:

BATTERY AND CHARGING:

BREAKAWAY SYSTEM:	2382 Brightway Group Electric Breakaway Kit
WIRING HARNESS:	All-Weather Wiring Harness (7-Way RV)
FRAME WIRING:	Double Insulated Wiring Harness

LIGHTING:


LIGHTS:	DOT Approved Tecniq LED Lights
---------	--------------------------------

SAFETY:


REFLECTIVE TAPE:	3M Dot Compliant Reflective Tape
------------------	----------------------------------

COLORS:

ACTUAL COLOR MAY VARY, CHECK SPECIFIC MODEL PAGE FOR AVAILABLE COLORS

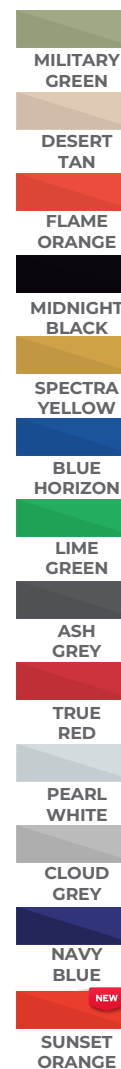

SCAN ME



EVERY. DETAIL. MATTERS.