



The HZH Gooseneck Dump Trailer is engineered for heavy-duty, high-capacity performance, offering 16', 18', and 20' lengths with a GVWR up to 30,000 lbs. It features 10K, 12K, or 16K tandem Lippert axles, a 12" I-beam main frame, and a 96" bed width. Equipped with a 12-ton telescopic cylinder, heavy-duty slide-in ramps, Mega lockable toolbox, and double slipper mechanical suspension, the HZH ensures durability and reliable dumping for demanding jobs.

STANDARD FEATURES

TRAILER SPECS:

DIMENSIONS:

AVAILABLE LENGTHS:	16', 18', 20'
SIDE HEIGHT:	2'
BED WIDTH:	96"
BED HEIGHT:	37"

WEIGHT RATING:

AXLE COUNT:	2
GAWR:	10,000 lbs, 12,000 lbs, 16,000 lbs
GVWR:	25,000 lbs, 25,900 lbs, 30,000 lbs

FINISH:

PAINT TYPE:	Powdercoat
PREP:	Steel Grit Blasted
COLORS:	Military Green, Desert Tan, Flame Orange, Midnight Black, Spectra Yellow, Blue Horizon, Lime Green, Ash Grey, True Red, Pearl White, Cloud Grey, Navy Blue, Sunset Orange
STYLE:	2 Tone Colors Available, Chassis / Dump

WARRANTY:


AXLE WARRANTY:	6 Year Lippert Spring Axle Warranty
TRAILER WARRANTY:	Three (3) Year Frame One (1) Year Parts Warranty

HORIZON HEAVY DUTY DUMP TRAILER

GOOSENECK

LENGTHS:	16', 18', 20'
SIDE HEIGHTS:	2', 3', 4'
AXLE COUNT:	2
AXLE RATING :	10k, 12k, 16k DUALS
GVWR:	25,000 lbs - 30,000 lbs

16'-18'-20'	25K-25.9K-30K	12"
LENGTH	GVWR RANGE OPTIONS	I-BEAM FRAME

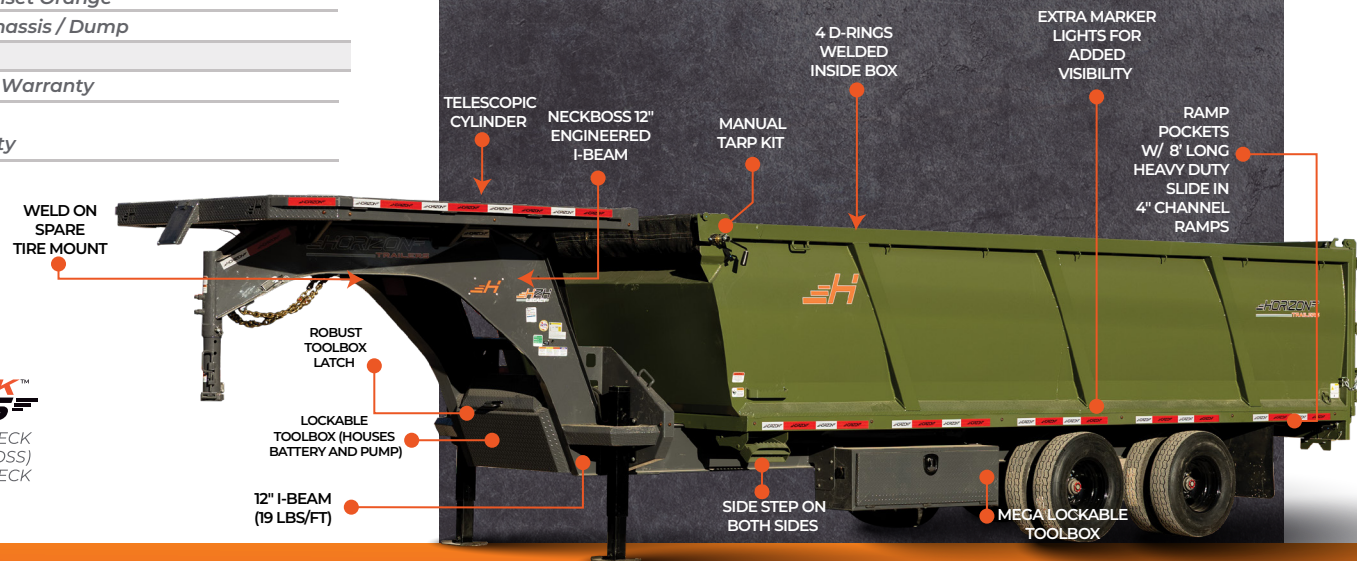

ROUNDED
STEEL
SIDES



NECKBOSS™
SLANTED NECK
(NECK BOSS)
GOOSENECK

EVERY. DETAIL. MATTERS.

NOTE: Image shown may include optional features not standard to the model.

TONGUE:

TONGUE:	
TYPE:	Neckboss 12" Engineered I-Beam
LENGTH:	98" (From Behind Riser)
HEIGHT:	70" (From Underneath Neck)
SPARE:	Weld On Spare Tire Mount

COUPLER:

STANDARD COUPLER: Adjustable 2-5/16" Gn Coupler (30,000 lbs)

JACKS:

FRONT JACKS: 2 Side Wind Spring Loaded Drop Jack Legs (12,000 lbs)

TOOLBOX:

TOOLBOX: Mega Lockable Toolbox Houses Battery & Pump (w/ Extra Storage)

SAFETY:

SAFETY CHAINS: 3/8" Grade 70 Safety Chain w/Clevis Hook (2 each)

CHASSIS:

FRAME:

25K- 25.9K GVWR MAIN FRAME: 12" I-Beam (19 lbs/ft)

30K GVWR MAIN FRAME: 12" I-Beam (22 lbs/ft)

DUMP:

BED:

BED WIDTH: 96"

BED HEIGHT: 37"

FLOORING: 7ga. Steel Bed

FRAME: 3" x 4" x 11ga. Tubing Bed Frame

CROSSMEMBERS: 3" Channel (3.50 lbs/ft) 16" Spacing

D-RINGS: 4 D Rings Welded Inside Box

DUMP ANGLE: 44° - 48°

REAR:

GATE: 3 Way Door - Spreader Gate

RAMPS: Ramp Pockets w/ 8' Long Heavy Duty Slide
In 4" Channel Ramps

(5,000 LBS WHEEL RATING EACH ONLY OVER AREA OF 12" OR MORE)

SIDES:

SIDE HEIGHT: 2'

TOP RAIL WIDTH: 96"

THICKNESS: 10ga.

TYPE: Rounded Steel

TOP RAIL: 3" x 5" x 11ga. Tubing

STAKE POCKETS: 1,5/8" x 3,5/8" (1D) Stake Pockets

HOOKS: 3/8" Round "J" Hooks

SAFETY:

TARP: Ground Level Crank Over Tarp Kit

LIFT SYSTEM:

HYDRAULICS:

TELESCOPIC DUMP 16', 18', 20': Telescopic Cylinder (12 Ton)

SYSTEM: 2 Button Hydraulic - Power Up / Gravity Down

PUMP: KTI 12V Hydraulic Pump

CONTROLLER: 14' Control Cable

RUNNING GEAR:

TIRES:

10K - 12K AXLES: ST235/80R16, Dual 10PR 3,080 lbs

RIMS: 16" Black Mod Wheels

16K AXLES: ST235/75R17.5, Dual 18PR 5,675 lbs

RIMS: 17.5" Black Mod Wheels

AXLES:

10K AXLE TYPE: 10k Lippert Electric Brake Auto Adjust Dual Oil
Bath Spring Axles 8 On 6.5"

12K AXLE TYPE: 12k Lippert Electric Brake Auto Adjust Dual Oil
Bath Spring Axles 8 On 6.5"

16K AXLE TYPE: 16k Lippert Electric Brake Auto Adjust Dual Oil
Bath Spring Axles 8 On 10.83"

AXLE COUNT: 2 Axles

AXLE WARRANTY: 6 Year Lippert Spring Axle Warranty

SUSPENSION:

SUSPENSION TYPE: Heavy Duty Double Slipper Mechanical Suspension

ELECTRICAL AND LIGHTING:

BATTERY AND CHARGING:

BATTERY: 1 - Interstate 27 Deep Cycle Battery

CHARGING SYSTEM: 110V Integrated Trickle Charger

WIRING HARNESS: All-Weather Wiring Harness (7-Way RV)

FRAME WIRING: Double Insulated Wiring Harness

LIGHTING:

LIGHTS: DOT Approved Tecniq LED Lights

SAFETY:

REFLECTIVE TAPE: 3M Dot Compliant Reflective Tape

COLORS:

ACTUAL COLOR MAY VARY, CHECK SPECIFIC MODEL PAGE FOR AVAILABLE COLORS

