



The HZH Pintle Hitch Dump Trailer is engineered for heavy-duty, high-capacity performance, offering 16', 18', and 20' lengths with a GVWR range of 25,000 to 30,000 lbs. It features tandem 10K, 12K, or 16K axles, a 12" I-Beam frame, and a 7-gauge steel bed. The trailer includes a 12-ton telescopic hoist, 8' heavy-duty slide-in ramps, manual tarp kit, and DOT-compliant LED lighting for optimal functionality.

STANDARD FEATURES

TRAILER SPECS:

DIMENSIONS:

AVAILABLE LENGTHS:	16', 18', 20'
SIDE HEIGHT:	2'
BED WIDTH:	96"
BED HEIGHT:	37"

WEIGHT RATING:

AXLE COUNT:	2
GAWR:	10,000 lbs, 12,000 lbs, 16,000 lbs
GVWR:	25,000 lbs, 25,900 lbs, 30,000 lbs

FINISH:

PAINT TYPE:	Powdercoat
PREP:	Steel Grit Blasted
COLORS:	Military Green, Desert Tan, Flame Orange, Midnight Black, Spectra Yellow, Blue Horizon, Lime Green, Ash Grey, True Red, Pearl White, Cloud Grey, Navy Blue, Sunset Orange
STYLE:	2 Tone Colors Available, Chassis / Dump

WARRANTY:

AXLE WARRANTY:	6 Year Lippert Spring Axle Warranty
TRAILER WARRANTY:	Three (3) Year Frame One (1) Year Parts Warranty



ROUNDED
STEEL
SIDES


NECKBOSS™
ENGINEERED
I-BEAM

HORIZON HEAVY DUTY DUMP TRAILER

PINTLE HITCH

LENGTHS:	16', 18', 20'
SIDE HEIGHTS:	2', 3', 4'
AXLE COUNT:	2
AXLE RATING :	10k, 12k, 16k DUALS
GVWR:	25,000 lbs - 30,000 lbs

16'-18'-20'	25K-25.9K-30K	12"
LENGTHS	GVWR RANGE OPTIONS	I-BEAM FRAME

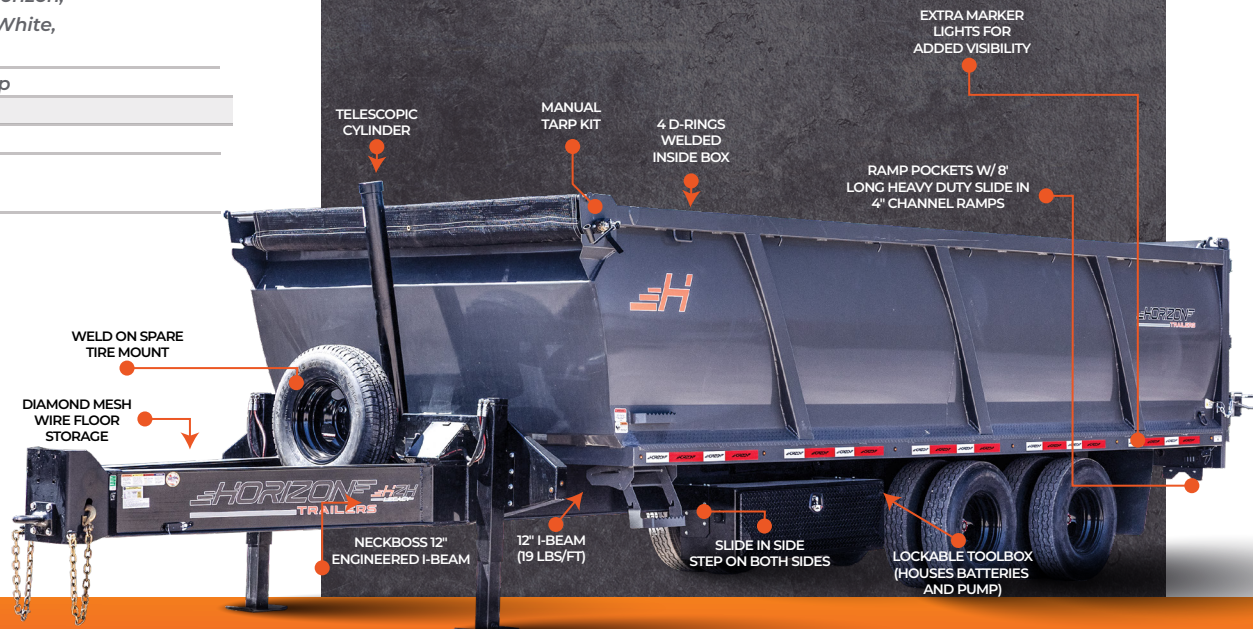

NOTE: Image shown may include optional features not standard to the model.

EVERY. DETAIL. MATTERS.

TONGUE:

TONGUE:	
TYPE:	Neckboss 12" Engineered I-Beam
LENGTH:	83"
SPARE:	Weld On Spare Tire Mount

COUPLER:

STANDARD COUPLER:	Pintle Ring (42,000 lbs)
-------------------	--------------------------

JACKS:

FRONT JACK:	2 Side Wind Spring Loaded Drop Jack Legs (12,000 lbs)
-------------	---

TOOLBOX:

TOOLBOX:	Diamond Mesh Wire Floor Storage
----------	---------------------------------

SAFETY:

SAFETY CHAINS:	3/8" Grade 70 Safety Chain w/Clevis Hook (2 each)
----------------	---

CHASSIS:

FRAME:	
25K- 25.9K GVWR MAIN FRAME:	12" I-Beam (19 lbs/ft)
30K GVWR MAIN FRAME:	12" I-Beam (22 lbs/ft)

DUMP:

BED:	
BED WIDTH:	96"
BED HEIGHT:	37"
FLOORING:	7ga. Steel Bed
FRAME:	3" x 4" x 11ga. Tubing Bed Frame
CROSSMEMBERS:	3" Channel (3.50 lbs/ft) 16" Spacing
D-RINGS:	4 D Rings Welded Inside Box
DUMP ANGLE:	44° - 48°

REAR:

GATE:	3 Way Door - Spreader Gate
RAMPS:	Ramp Pockets w/ 8' Long Heavy Duty Slide In 4" Channel Ramps <small>(5,000 LBS WHEEL RATING EACH ONLY OVER AREA OF 12" OR MORE)</small>

SIDES:

SIDE HEIGHT:	2'
TOP RAIL WIDTH:	96"
THICKNESS:	10ga.
TYPE:	Rounded Steel
TOP RAIL:	3" x 5" x 11ga. Tubing
STAKE POCKETS:	1,5/8" x 3,5/8" (ID) Stake Pockets
HOOKS:	3/8" Round "J" Hooks

SAFETY:

TARP:	Ground Level Crank Over Tarp Kit
-------	----------------------------------

LIFT SYSTEM:

HYDRAULICS:	
TELESCOPIC DUMP 16', 18', 20':	Telescopic Cylinder (12 Ton)
SYSTEM:	2 Button Hydraulic - Power Up / Gravity Down
PUMP:	KTI 12V Hydraulic Pump
CONTROLLER:	14' Control Cable

RUNNING GEAR:

TIRES:	
10K - 12K AXLES:	ST235/80R16, Dual 10PR 3,080 lbs
RIMS:	16" Black Mod Wheels
16K AXLES:	ST235/75R17.5, Dual 18PR 5,675 lbs
RIMS:	17.5" Black Mod Wheels

AXLES:

10K AXLE TYPE:	10k Lippert Electric Brake Auto Adjust Dual Oil Bath Spring Axles 8 On 6.5"
12K AXLE TYPE:	12k Lippert Electric Brake Auto Adjust Dual Oil Bath Spring Axles 8 On 6.5"
16K AXLE TYPE:	16k Lippert Electric Brake Auto Adjust Dual Oil Bath Spring Axles 8 On 10.83"
AXLE COUNT:	2 Axles
AXLE WARRANTY:	6 Year Lippert Spring Axle Warranty

SUSPENSION:

SUSPENSION TYPE:	Heavy Duty Double Slipper Mechanical Suspension
------------------	---

ELECTRICAL AND LIGHTING:

BATTERY AND CHARGING:	
BATTERY:	1 - Interstate 27 Deep Cycle Battery
CHARGING SYSTEM:	110V Integrated Trickle Charger
WIRING HARNESS:	All-Weather Wiring Harness (7-Way RV)
FRAME WIRING:	Double Insulated Wiring Harness

LIGHTING:

LIGHTS:	DOT Approved Tecniq LED Lights
---------	--------------------------------

SAFETY:

REFLECTIVE TAPE:	3M Dot Compliant Reflective Tape
------------------	----------------------------------

COLORS:

ACTUAL COLOR MAY VARY, CHECK SPECIFIC MODEL PAGE FOR AVAILABLE COLORS

