



The HRD Pintle Hitch Roll Off Dump Trailer is engineered for heavy-duty, high-capacity roll-off performance. With 14', 16', and 20' lengths and a 24,000 lbs GVWR, it features tandem 10K Super Single axles, a 10" I-beam frame, and a 2" x 5" x 7ga. bed structure. Equipped with a 20K hoist or 12-ton telescopic cylinder, this trailer offers exceptional strength, a 60° loading angle, and rugged reliability.

## STANDARD FEATURES

### TRAILER SPECS:

#### DIMENSIONS:

AVAILABLE LENGTHS: 14', 16', 20'

DECK WIDTH: 61"

DECK HEIGHT: 30"

#### WEIGHT RATING:

AXLE COUNT: 2

GAWR: 10,000 lbs

GVWR: 24,000 lbs

#### FINISH:

PAINT TYPE: Powdercoat

PREP: Steel Grit Blasted

COLORS: Military Green, Desert Tan, Flame Orange, Midnight Black, Spectra Yellow, Blue Horizon, Lime Green, Ash Grey, True Red, Pearl White, Cloud Grey, Navy Blue, Sunset Orange

#### WARRANTY:

AXLE WARRANTY: 6 Year Lippert Spring Axle Warranty

TRAILER WARRANTY: Three (3) Year Frame

One (1) Year Parts Warranty

**NECK™  
BOSS®**  
ENGINEERED  
I-BEAM

## HEAVY DUTY ROLL OFF DUMP TRAILER HORIZON

### PINTLE HITCH

LENGTHS:	14', 16', 20'
SIDE HEIGHTS:	30"
AXLE COUNT:	2
AXLE RATING :	10k SUPER SINGLES
GVWR:	24,000 lbs

14'-16'-20'


24k

10"

LENGTHS

GVWR RANGE OPTIONS

I-BEAM FRAME

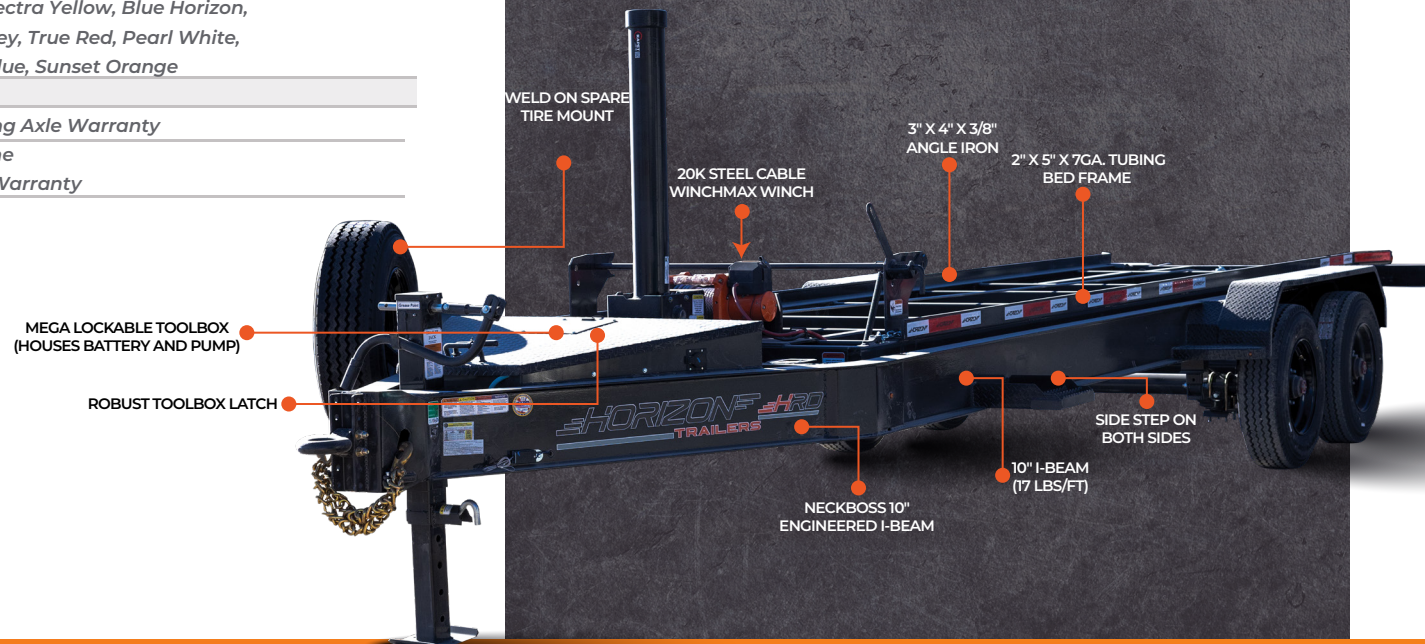

NOTE: Image shown may include optional features not standard to the model.

EVERY. DETAIL. MATTERS.

## TONGUE:

### TONGUE:

TYPE:	Neckboss 10" Engineered I-Beam
LENGTH:	60"
SPARE:	Weld On Spare Tire Mount

### COUPLER:

STANDARD COUPLER:	Pintle Ring (25,000 lbs)
-------------------	--------------------------

### JACKS:

FRONT JACK:	1 Side Wind Spring Loaded Drop Jack Leg (12,000 lbs)
-------------	--

### TOOLBOX:

TOOLBOX:	Mega Lockable Toolbox Houses Battery & Pump (w/ Extra Storage)
----------	---

### SAFETY SYSTEM:

SAFETY CHAINS:	3/8" Grade 70 Safety Chain w/Clevis Hook (2 each)
----------------	---

## CHASSIS:

### FRAME:

MAIN FRAME:	10" I-Beam (17 lbs/ft)
-------------	------------------------

## DUMP:

### BED:

DECK HEIGHT:	30"
FRAME:	2" x 5" x 7ga. Tubing Bed Frame
CROSSMEMBERS:	2" x 5" x 7ga. Crossmembers
LOADING ANGLE:	60°
DUMP ANGLE:	55°
BOTTOM RAIL DECK WIDTH :	61"

### SIDES:

TYPE:	3" x 4" x 3/8" Angle Iron
FENDERS:	14ga. Diamond Plate Steel Fenders

### SAFETY:

SAFETY CHAINS FOR ROLL OFF:	2 - 1/4" 30 Grade Chains w/Clevis Hook
-----------------------------	--

## LIFT SYSTEM:

### HYDRAULICS:

HOIST DUMP 14':	Hoist w/ 6" x 21" Single Push Cylinder (20,000 lbs)
HOIST DUMP 16':	Hoist w/ 6" x 30" Single Push Cylinder (20,000 lbs)
HOIST DUMP 20':	(TELESCOPIC ONLY)
SYSTEM:	2 Button Hydraulic - Power Up / Power Down
PUMP:	KTI 12V Hydraulic Pump
CONTROLLER:	14' Control Cable
TELESCOPIC DUMP 14', 16', 20':	Telescopic Cylinder (12 Ton)
SYSTEM:	2 Button Hydraulic - Power Up / Gravity Down
PUMP:	KTI 12V Hydraulic Pump
CONTROLLER:	14' Control Cable

## RUNNING GEAR:

### TIRES:

10K AXLES:	ST235/75R17.5, Super Single 18PR 6005 lbs
RIMS:	17.5" Black Mod Wheels

### AXLES:

AXLE TYPE:	10k Lippert Electric Brake Auto Adjust S/Single Oil Bath Spring Axles 8 On 6.5"
AXLE COUNT:	2 Axles
AXLE WARRANTY:	6 Year Lippert Spring Axle Warranty

### SUSPENSION:

SUSPENSION TYPE:	Spring
------------------	--------

## ELECTRICAL AND LIGHTING:

### BATTERY AND CHARGING:

BATTERY:	1 - Interstate 27 Deep Cycle Battery
CHARGING SYSTEM:	110V Integrated Trickle Charger
WIRING HARNESS:	All-Weather Wiring Harness (7-Way RV)
FRAME WIRING:	Double Insulated Wiring Harness

### LIGHTING:


LIGHTS:	DOT Approved Tecniq LED Lights
---------	--------------------------------

### SAFETY:


REFLECTIVE TAPE:	3M Dot Compliant Reflective Tape
------------------	----------------------------------

## COLORS:

ACTUAL COLOR MAY VARY, CHECK SPECIFIC MODEL PAGE FOR AVAILABLE COLORS

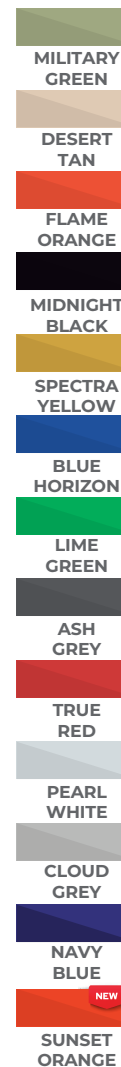

SCAN ME



EVERY. DETAIL. MATTERS.